

 Price List

Low Voltage Distribution Products

With effect from January 15th, 2026



EasyPact CVS:

■ Range Overview (up to 630A)	10
■ EasyPact CVS Fixed Thermal Fixed Magnetic (16A -250A)	11
■ MCCBs for Distribution Network	12
■ EasyPact CVS Switch Disconnector Version	16
■ EasyPact CVS 500V DC	16
■ Accessories	17
■ Range Overview (800A to 1250A)	20
■ MCCB for Distribution Network	22

Moulded Case Circuit Breakers:**ComPact NSX:**

■ Range Overview (up to 630A)	29
■ MCCBs for Distribution Network	30
■ Circuit Breakers for Motor Protection	33
■ Accessories	35
■ Unique Modular Ground Fault Protection	38

ComPact NS:

■ Range Overview	41
■ New Gen Compact NS	42

EasyPact EZC 43**Earth Leakage Protection:**

■ Vigirex - Earth Leakage Protection Relay	44
--	----

Switch Disconnector:

■ ComPact- INS & INV Switch Disconnectors	45
■ Switch Disconnector fuse units - range overview	46
■ FuPact Switch Disconnector and Accessories	47

Air Circuit Breakers:**MasterPacT MTZ Active:**

■ Range Overview	49
■ TransferPacT UC (ATS Kit) 	51

EasyPact NW:


■ Range Overview	52
■ Draw-out type Circuit breakers and Switch Disconn. (800-4000A)	54
■ Fixed type Circuit breakers & Switch Disconnectors (800-4000A)	56
■ Accessories	58
■ Draw-out type Circuit breakers and Switch Disconn. (630-1600A)	59
■ Fixed type Circuit breakers & Switch Disconnectors (630-1600A)	60

Automatic Transfer Switch:

■ Range Overview	63
■ ASCO 7000 SERIES IEC Medium Voltage	64
■ ATS (ASCO) Series 7000/300	66
■ ATS WOTPC	67
■ TransferPacT Active Automatic	69
■ TransferPacT Active Automatic Coordination Table	71
■ WATSN (ATS and RTS)	76
■ WATSN Coordination Table	77



Environmental Data Program

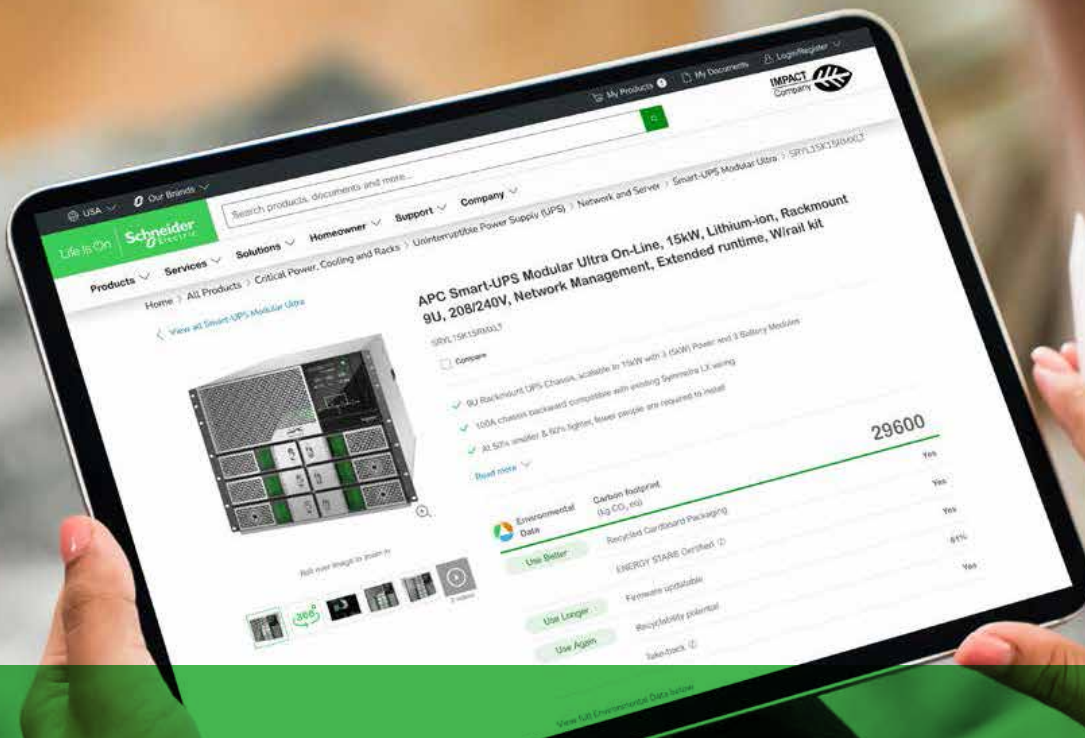


Next-level transparency for better-informed product choices

The Environmental Data Program is a framework for how we measure, categorize, and compare the environmental attributes and footprint of our products.

Using a rigorous, fact-based methodology, the program provides environmental data from across the product lifecycle.

Five data categories across the product lifecycle

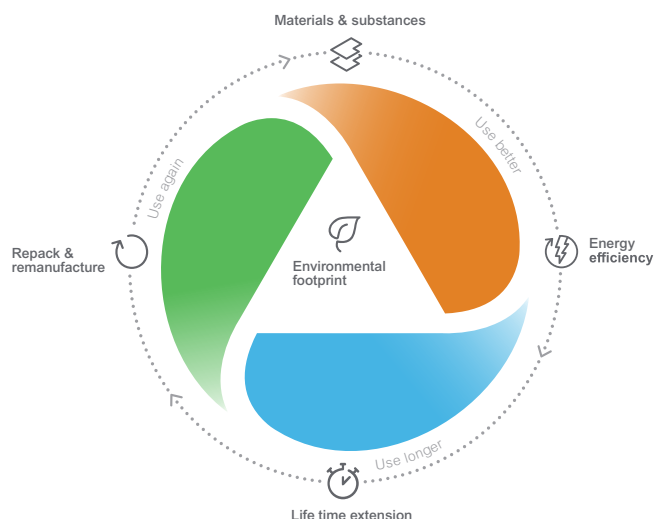

Use Better: How sustainable a product is, including environmental footprint, materials and substances, packaging, and energy efficiency.

Use Longer: How a product's life time can be effectively extended in terms of reparability and updatability.

Use Again: How a product can be reused, from dismantling and remanufacturing to recyclability and manufacturer take back.

With this transparent, verified data, customers and partners are empowered to make conscious environmental choices and accurately evaluate and report on sustainability performance.

All our hardware offers have an associated environmental data available on se.com product pages.

EcoStruxure™ Facility Expert

Designed to keep you in touch with your equipment

Say goodbye to paperwork, outdated files, conflicting information, missing documents, and unplanned maintenance.

Say hello to extended insights, easier maintenance, greater productivity and information at your fingertips.

Because now, your electrical system becomes your partner with a simple QR code.



Collaborate and get things done!

- **Toss the papers!** Group user manuals, single-line drawings, photos, factory and site acceptance test reports, spare parts lists and more behind a simple QR code.
- **Get crucial data organized!** Free collaborative digital tool enables you to share information with your partners and team members.



Simplify and manage maintenance activities

- **Ease the set up of preventive maintenance plans** with auto-generated maintenance templates.
- **Streamline maintenance and operation** by assigning tasks and centralizing maintenance schedules, logs and reports.
- Leverage your digital community to **solve issues quickly**.
- **Keep your installation healthy** and maximize its life.

Scan and Download


For free access to EcoStruxure™ Facility Expert



Scan to know more

About how EcoStruxure™ Facility Expert can help you manage your equipment better



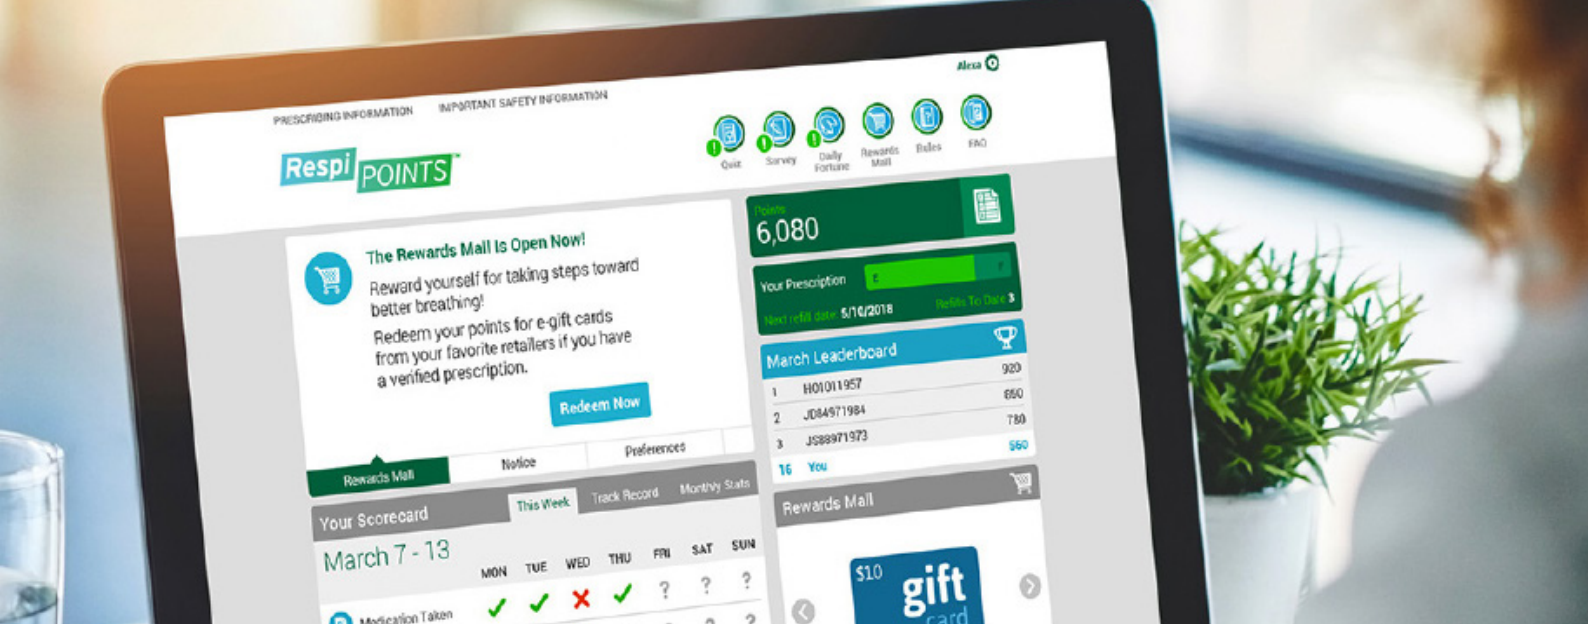

Product Selector

-Select Schneider products through digital tool

Product selector is an online software tool embedded in Schneider website or in distributor's website to help selecting the right product with its accessories. Product Selector aims at providing a fast, secure and smart way of selecting products. It includes the selection of the basic frame, control unit, accessories and Digital Modules. Compared with the traditional way of filling up order forms or specifying customer functions, it brings the following benefits:


Easy access: no login, direct access on Schneider's website or on the website of distributor

Reliable: The compatibility between the main product and the accessories is constantly tested


Wide coverage: more than 130 Schneider ranges are available (MasterPact)

Choose Products in simple steps:

1. Go to range page on se.com

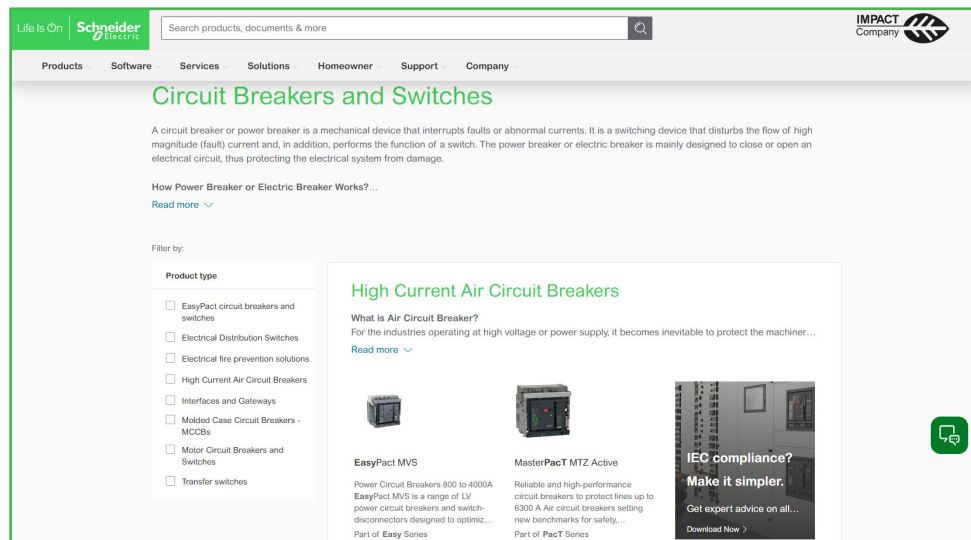

2. Click on Launch Product Selector

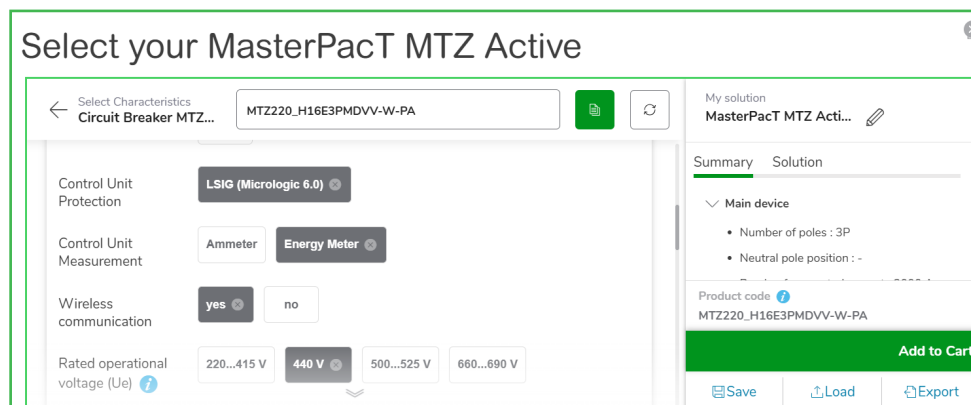

MasterPact MTZ Active



MasterPact MTZ with
MicroLogic Active.
Ready to act.

Safety

Energy Reduction Maintenance Settings (ERMS) enhance protection against arc flash hazards

Application-specific integrated circuits (ASICs) increase IP safety, improve reliability, and reduce cost

 **Near Field Communication (NFC)** provides remote access via a smartphone and the EcoStruxure Power Device app

Flexibility

USB-C port allows **quick setup** and reflects latest communications best practices

 **User-friendly interface** facilitates operation, diagnostics, and maintenance

 **Alarms can be customized** to voltage requirements of different machines and applications

Continuity

 **Industry-first QR code solution** provides immediate access to the root cause of outages and advises the best action to remedy them

Fast-trip capability prevents power overloads, safeguarding people and property

Simplicity

Field-swappable control unit allows last-minute changeouts, eliminating entire breaker replacements and avoiding project delays

Intuitive control unit allows quick setting of all protection functions

EasyPact™ CVS

Molded-case circuit breakers and
switch-disconnectors from 16 to 630A



se.com/in

Schneider
Electric

EasyPact CVS

Easy Choice for Quality and Value



- **EasyPact CVS** MCCBs upto 630A is the easy choice for all your most common electrical distribution applications
- **EasyPact CVS** also available with Electronic Trip release LSol from 40A to 250A
- Encapsulated double break roto technique ensures outstanding current limiting capability
- High electrical / mechanical endurance for enhanced service life
- Single accessory reference for different functions – on/off, trip and fault trip – improves shop floor efficiency
- Separate electrical fault indication for ease of fault diagnosis
- Class 2 front face, Locking in off position, Suitable for Isolation
- Optimized footprint in two frame sizes

Range Details:

- Breaking capacity 25kA to 50kA, $I_{cs} = 100\% I_{cu}$
- TMD, MA, Electronic trip units (LSol protection 40A to 630A)
- Electronic trip units (LSIG protection 25A to 630A)
- 3P & 4P versions available
- Common accessories upto 630A

- BIS Certified 
- Ics = 100% Icu as per IEC 60947-2

Breaking Capacity as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
EasyPact CVS 100 to 250A Fixed Thermal Fixed Magnetic					
25kA	16A	LV510300FT	8960	LV510310FT	12450
	25A	LV510301FT	8960	LV510311FT	12450
	32A	LV510302FT	8960	LV510312FT	12450
	40A	LV510303FT	8960	LV510313FT	12450
	50A	LV510304FT	8960	LV510314FT	12450
	63A	LV510305FT	8960	LV510315FT	12450
	80A	LV510306FT	8960	LV510316FT	12450
	100A	LV510307FT	9000	LV510317FT	12450
	125A	LV516302FT	13170	LV516312FT	16130
	160A	LV516303FT	17190	LV516313FT	20610
	200A	LV525302FT	22760	LV525312FT	28450
Breaking Capacity as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
25kA	250A	LV525303FT	26630	LV525313FT	32580

Breaking Capacity as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
EasyPact CVS 100 to 250A Fixed Thermal Fixed Magnetic					
36kA	16A	LV510330FT	12250	LV510340FT	15300
	25A	LV510331FT	12250	LV510341FT	15300
	32A	LV510332FT	12250	LV510342FT	15300
	40A	LV510333FT	12250	LV510343FT	15300
	50A	LV510334FT	12250	LV510344FT	15300
	63A	LV510335FT	12250	LV510345FT	15300
	80A	LV510336FT	12250	LV510346FT	15300
	100A	LV510337FT	12250	LV510347FT	15300
	125A	LV516332FT	13610	LV516342FT	16890
	160A	LV516333FT	18020	LV516343FT	21460
	200A	LV525332FT	25950	LV525342FT	32140
Breaking Capacity as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
36kA	250A	LV525333FT	28770	LV525343FT	35620

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

- BIS Certified 
- Ics = 100% Icu as per IEC 60947-2

Breaking Capacity as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
EasyPact CVS 100 to 630A Overload Setting (Ir) 0.7 - 1 x In					
25kA	16A	LV510300 	10570	LV510310	14700
	25A	LV510301 	10570	LV510311 	14700
	32A	LV510302 	10570	LV510312 	14700
	40A	LV510303 	10570	LV510313 	14700
	50A	LV510304 	10570	LV510314	14700
	63A	LV510305 	10570	LV510315 	14700
	80A	LV510306 	10570	LV510316 	14700
	100A	LV510307 	10630	LV510317 	14700
	125A	LV516302 	15550	LV516312 	19030
	160A	LV516303 	20290	LV516313 	24320
	200A	LV525302 	26860	LV525312	33580
Breaking Capacity as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
25kA	250A	LV525303 	31430	LV525313	38460
Breaking Capacity as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
EasyPact CVS 100 to 630A Overload Setting (Ir) 0.7 - 1 x In					
36kA	16A	LV510330 	14460	LV510340	18060
	25A	LV510331 	14460	LV510341	18060
	32A	LV510332 	14460	LV510342 	18060
	40A	LV510333 	14460	LV510343 	18060
	50A	LV510334 	14460	LV510344	18060
	63A	LV510335 	14460	LV510345 	18060
	80A	LV510336 	14460	LV510346	18060
	100A	LV510337 	14460	LV510347 	18060
	125A	LV516332 	16050	LV516342	19930
	160A	LV516333 	21260	LV516343	25320
	200A	LV525332 	30620	LV525342 	37940
Breaking Capacity as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
36kA	250A	LV525333	33960	LV525343 	42030
	320A	LV540305	46430	LV540308 	57610
	400A	LV540306	46700	LV540309 	58120
	500A	LV563305 	52940	LV563308 	67050
	630A	LV563307 	60620	LV563310 	76510
Breaking Capacity as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
50kA	16A	LV510470 	19620	LV510480	24120
	25A	LV510471	19620	LV510481	24120
	32A	LV510472 	19620	LV510482 	24120
	40A	LV510473	19620	LV510483	24120
	50A	LV510474	19620	LV510484	24120
	63A	LV510475 	19620	LV510485 	24120
	80A	LV510476 	19620	LV510486	24120
	100A	LV510477 	19620	LV510487 	24120
	125A	LV516462 	25510	LV516467	27910
	160A	LV516463 	27600	LV516468	32870
50kA	200A	LV525452	35720	LV525457 	44880
	250A	LV525453	38410	LV525458 	47320
	320A	LV540315 	50300	LV540318	62180
	400A	LV540316 	50670	LV540319 	63320
	500A	LV563315 	58750	LV563318	74140
	630A	LV563317 	64000	LV563320 	83780

For Details on stockable and non-stockable status, technical parameter, please Contact Customer Care Centre

 NORMAL STOCK ITEMS

W.E.F. January 15th, 2026



EasyPact CVS 40 to 630A with Electronic Trip Unit ETS 2.2 and ETS 2.3

- BIS Certified 
- Ics = 100% Icu as per IEC 60947-2
- Suitable for Isolation
- Adjustable Overload from 0.4 to 1 x In
- Adjustable Short Circuit from 1.4 to 10 x Ir
- Adjustable Neutral Protection - N, N/2, OFF for 4 Pole MCCB
- Inbuilt Thermal Memory

Breaking Capacity Ics as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
EasyPact CVS 40 to 250A					
25KA	40	LV510550	27640	LV510580	35570
	100	LV510551	27640	LV510581	35570
	160	LV516505	35300	LV516508	45020
	250	LV525505	46390	LV525508	59500
36KA	40	LV510552	28100	LV510582	35730
	100	LV510553	28100	LV510583	35730
	160	LV516506	35930	LV516509	49650
	250	LV525506	48570	LV525509	67300
50KA	40	LV510554	33700	LV510584	45600
	100	LV510555	33700	LV510585	46970
	160	LV516507	42710	LV516510	55550
	250	LV525507	55470	LV525510	72090

Breaking Capacity Ics as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
EasyPact CVS 400 to 630A					
36 kA	400A	LV540505 	57390	LV540506 	73940
	630A	LV563505 	63070	LV563506 	83710
50 kA	400A	LV540510 	62990	LV540511 	81550
	630A	LV563510 	68590	LV563511 	89680

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.


 NORMAL STOCK ITEMS

W.E.F. January 15th, 2026


BIS Certified 

Circuit Breakers for Motor Protection

Breaking Capacity 50kA, Ics=100%Icu



Current Rating	Magnetic setting	2.5	6.3	12.5	25	50	100	150	220	320	500
CVS 100	Im = In x ...	6....14 x In									
CVS 160/250								9....14 x In			
CVS 400										6....13 x In	
CVS 630											6....13 x In



Frame 1	2.5 to 220A
Frame 2	320 to 500A

With Magnetic Trip Unit MA Type

Breaking Capacity Ics as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]
50kA	2.5A	LV510450	14470
	6.3A	LV510451	14470
	12.5A	LV510452 	15730
	25A	LV510453 	20910
	50A	LV510454 	21220
	100A	LV510455 	21560
	150A	LV516451 	27290
Breaking Capacity Ics as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]
50kA	220A	LV525442 	28780
	320A	LV540552 	45820
	500A	LV563552	54530



EasyPact CVS with built-in LSIG Electronic trip unit ETS 6

- BIS Certified 
- Rated Current, I_n (A) – 25, 40, 100, 160, 250, 400, 630
- Breaking capacity ($I_{cu}=I_{cs}$) (kA) at 415V – 25 (only up to 250A), 36, 50
- 3 Pole and 4 pole versions.
- Built-in μP based trip unit having protection functions LSIG.
Variable current setting for L,S,I and G and variable time delay setting for L,S and G.
- Neutral O/L protection possible with 3P MCCB (with External Neutral CT) and 4P MCCB
- Last Fault trip history on LCD screen of MCCB i.e Faulty phase, Type of Fault and interrupted current.

With ETS 6 Electronic trip unit (built in LSIG protection)

Breaking Capacity I_{cu} as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
25kA	25A	LV510600	On Request	LV510610	On Request
	40A	LV510608	46170	LV510618	53580
	100A	LV510609	46170	LV510619	53580
	160A	LV516600	53040	LV516610	65750
Breaking Capacity I_{cu} as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
25kA	250A	LV525600	62610	LV525610	76940
Breaking Capacity I_{cu} as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
36kA	25A	LV510620	On Request	LV510630	On Request
	40A	LV510628	48120	LV510638	55850
	100A	LV510629	48120	LV510639	55850
	160A	LV516620	54960	LV516630	68160
Breaking Capacity I_{cu} as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
36kA	250A	LV525620	66260	LV525630	81590
	400A	LV540620	79150	LV540630	91660
	630A	LV563620	86650	LV563630	105660
Breaking Capacity I_{cu} as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
50kA	25A	LV510640	On Request	LV510650	On Request
	40A	LV510648	52640	LV510658	62770
	100A	LV510649	52640	LV510659	62770
	160A	LV516640	63200	LV516650	75340
Breaking Capacity I_{cu} as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
50kA	250A	LV525640	69430	LV525650	84040
	400A	LV540640	83080	LV540650	99170
	630A	LV563640	91960	LV563650	118740

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

 NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

EasyPact CVS Switch Disconnecter Version



- BIS Certified  (upto 250A)
- Suitable for Isolation with positive contact indication as defined by standard IEC 60947-3.
- Compliance to utilization categories AC22A or AC23A
- Self protected due to high magnetic-set release
- Two frame sizes upto 630A
- Available in fixed version.
- Common Accessories as that of **EasyPact** CVS circuit breaker

Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
100A	LV510425	10630	LV510426	13470
160A	LV516425	12680	LV516426	15950
Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
250A	LV525425	26560	LV525426	35360
400A	LV540400	41080	LV540401	52280
630A	LV563400	46690	LV563401	62790

EasyPact CVS 500V DC* Application

Moulded Case Circuit Breakers for Distribution Network

Breaking Capacity as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
EasyPact CVS 100 to 630A Overload Setting (Ir) 0.7 - 1 x In					
Icu=70kA at(250VDC, 500VDC) Ics=100% Icu	16A	LV510470	19620	LV510480	24120
	25A	LV510471	19620	LV510481	24120
	32A	LV510472	19620	LV510482	24120
	40A	LV510473	19620	LV510483	24120
	50A	LV510474	19620	LV510484	24120
	63A	LV510475	19620	LV510485	24120
	80A	LV510476	19620	LV510486	24120
	100A	LV510477	19620	LV510487	24120
	125A	LV516462	25510	LV516467	27910
Icu=20kA at (250VDC,500VDC) Ics=25% Icu	160A	LV516463	27600	LV516468	32870
	200A	LV525452	35720	LV525457	44880
Icu=20kA at (250VDC,500VDC) Ics=50% Icu	250A	LV525453	38410	LV525458	47320
	320A	LV540315	50300	LV540318	62180
Icu=20kA at (250VDC,500VDC) Ics=100% Icu	400A	LV540316	50670	LV540319	63320
	500A	LV563315	58750	LV563318	74140
	630A	LV563317	64000	LV563320	83780
	500A	LV563305	52940	LV563308	67050
	630A	LV563307	60620	LV563310	76510

*: Kindly connect with SE Representative for DC Connection diagram wrt. 250VDC & 500VDC.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

 NORMAL STOCK ITEMS

W.E.F. January 15th, 2026



Indication contacts



Voltage Release



Padlocking accessory



Direct Rotary Handle



Extended Rotary Handle

Accessories for EasyPact CVS 100 - 630A

Auxiliary Contacts (Changeover) Multifunction

Description	Reference	Unit MRP [₹]
OF or SD or SDE or SDV	29450 ☒	1310
OF or SD or SDE or SDV low level	29452	1590
SDE adapter for trip unit TM or MA or ETS 2.3 #	LV429451 ☒	1210

To be considered alongwith SDE contact for MCCB with TMD/ETS 2.3/MA Trip Unit

Motor Mechanism

Type	100/250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Motor Mechanism - Direct Operating				
110-230V, AC /DC	LV435001	35440	LV435010	56930
400V, AC	LV435002	35440	LV435005	56930

Voltage Releases

Description	Shunt Release Reference	Unit MRP [₹]	Undervoltage Reference	Unit MRP [₹]
AC				
24 V 50/60 Hz	LV429384 ☒	3780	LV429404	4690
48 V 50/60 Hz	LV429385	3880	LV429405	4810
110-130 V 50/60 Hz	LV429386 ☒	3780	LV429406 ☒	4690
220-240 V 50/60 Hz	LV429387 ☒	3780	LV429407 ☒	4690
380-415 V 50 Hz	LV429388 ☒	3780	LV429408 ☒	4690
525 V 50 Hz	LV429389	3880	LV429409	6890
DC				
12 V	LV429382	3780	LV429402	4750
24 V	LV429390 ☒	3780	LV429410 ☒	4640
30 V	LV429391	3880	LV429411	6890
48 V	LV429392	3780	LV429412	4750
60 V	LV429383	5500	LV429403	6720
125 V	LV429393	3780	LV429413	4640
250 V	LV429394	3780	LV429414	4600

Rotary Handles

Description	100/160/250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Direct rotary handle				
Standard black handle	LV429337 ☒	1920	LV432597 ☒	2890
Extended rotary handle				
Standard extended rotary handle	LV429338_IN ☒	2630	LV432598_IN ☒	4680

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026


Installation Accessories

Description	Upto 100A only Reference	Unit MRP [₹]	160/250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Spreaders & Phase Barriers						
Spreaders (Set of 3) 3P	LV431563_IN ☒	750	LV431563 ☒	980	32492 ☒	2630
Spreaders (Set of 4) 4P	LV431564_IN ☒	1010	LV431564 ☒	1300	32493 ☒	3290
Phase Barriers (Set of 6)	*		*		LV432570 ☒	1240

Description	100/160/250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Interlocking				
For Breaker with Rotary Handle	LV429369	14240	LV432621	18010
For Breaker with Toggle	LV429354	17540	LV432614	18190
Mechanical Interlocking with Base Plate	29349**	-	32609**	-
Locking of Rotary Handle				
Locking Device	LV429344 ☒	920	LV432604 ☒	1240
Ronis Keylock (1 Lock + 1 Key set)	41940 ☒	13680	41940 ☒	13680
Ronis Keylock (2 Locks + 1 Key set)	41950 ☒	19620	41950 ☒	19620
Profalux Keylock (1 Lock + 1 Key set)	42888	12050	42888	12050
Profalux Keylock (2 Locks + 1 Key set)	42878	19620	42878	19620

* supplied as standard with spreaders

** Mechanical Interlocking with Base Plate to be ordered with Safety trip interlock (LV429270 for 29349 and LV432520 for 32609)

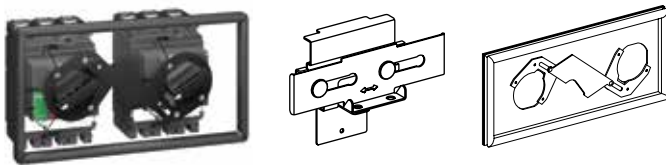

Accessories for CVS 100 - 630A

Manual Source change-over systems

- An additional accessory interlocks two devices with rotary handles to create a source changeover system. Closing of one device is possible only if the second is open.
- This function is compatible with direct or extended rotary handles.
- Up to three padlocks can be used to lock in the OFF or ON position.

Description	Reference	Unit MRP [₹]
Mechanical interlocking for circuit breakers		
With toggles 100A to 250A	LV429354	17540
With rotary handles 100A -250A	LV429369	14240
With toggles 400A to 630A	LV432614	18190
With rotary handles 400A to 630A	LV432621	18010

Accessories for ETS 6 Trip unit

Description	CVS100/160/250 Reference number	Rating	Unit MRP [₹]	CVS400/630 Reference number	Rating	Unit MRP [₹]
External neutral CT for 3 pole breaker with ETS6	LV429521	25 - 100 A	19060	LV432575	400 - 630 A	27510
	LV430563	150 - 250 A	29060			
				CVS 100 to 630 Reference number		Unit MRP [₹]
Pocket Battery For MCCB With ETS 6				LV434206		30450
24 VDC Terminal Block For MCCB With ETS 6				LV434210		8620

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Easy Series

EasyPact™ CVS

Molded-Case Circuit Breaker
from 800 to 1250 A



se.com/in

Schneider
Electric

Introduction Overview

State-of-the-art design, user-friendly features and a wide spectrum of protection releases of the MCCB range. Also recognised for its ergonomics, aesthetics and compactness. Specially designed and developed for extreme tropical conditions, it promises reliable performance in high ambient and humid environment.

Unfailingly, caters to the ever-evolving needs of customers, derived after in-depth analysis and customer feedback. Because we understand our customers' requirements and demands, our contemporary range of MCCBs never falls short of ensuring complete customer satisfaction. Moreover, complemented by a host of accessories, the EasyPact CVS range delivers comprehensive solutions to customer applications ensuring operational safety, reliability and versatility.



Features

- Range available from 800 to 1250 A
- Available in 3 pole and 4 pole
- Range of 50 kA breaking capacity
- Electronic trip unit release and Switch Disconnecter
- MCCBs for Distribution and SD version
- Wide range of Internal and External accessories
- RoHS compliant

Schneider Electric do not recommend the mix of different ranges of breakers.

Codes and standards

CVS range of MCCB series and accessories comply with:

- IEC 60947-1: General rules
- IEC 60947-2: Circuit-breakers

EasyPact CVS MCCB

Current rating	800 A, 1000 A, 1250 A
Release	Electronic trip unit, Switch Disconnecter

Trip Units


NA - Switch Disconnecter (SD)

LSI Protection - Electronic Trip Unit (ETS 2)

LSIG - Electronic Trip Unit (ETS 6)



Marking and Configuration

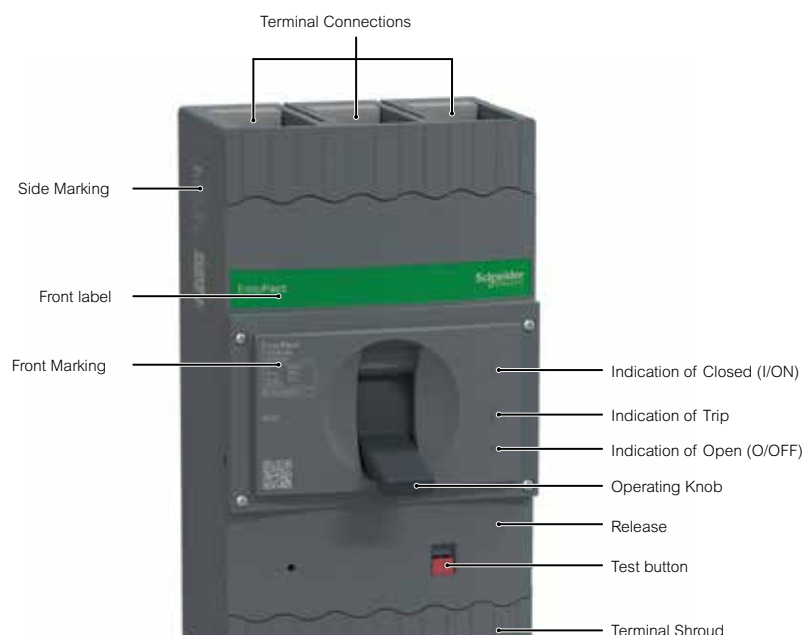

EasyPact CVS MCCB offers

Enhanced features

- Snap-fit accessories up to 800 to 1250 A
- Auxiliary contact for ON/OFF and Trip Indication
- Shunt coil for remote tripping
- Under Voltage coil

Accessories



Extended rotary handle



External neutral CT

Adaptor Kit



Spreaders link



Auxiliary 1 C/O



Auxiliary 2 C/O



Voltage release (MN)



Trip alarm contact 1 C/O



Auxiliary 1 C/O +
Trip alarm contact 1 C/O



Shunt release (MX)



EasyPact Molded Case Circuit Breaker 800 - 1250 N

Breaking Capacity Icu as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
ETS 2					
50 kA at 415 V AC	800 A	LV508231	On Request	LV508241	On Request
	1000 A	LV510231	On Request	LV510241	On Request
	1250 A	LV512231	On Request	LV512241	On Request
ETS 6					
50 kA at 415 V AC	800 A	LV508232	On Request	LV508242	On Request
	1000 A	LV510232	On Request	LV510242	On Request
	1250 A	LV512232	On Request	LV512242	On Request



EasyPact Molded Case Circuit Breaker 800 - 1250 SD

Breaking Capacity Icu as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
SD					
415 V AC	800 A	LV508230	On Request	LV508240	On Request
	1000 A	LV510230	On Request	LV510240	On Request
	1250 A	LV512230	On Request	LV512240	On Request



EasyPact Spreaders

Breaking Capacity Icu as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
	800 A	LV508530 (Set of 6)	On Request	LV508540 (Set of 8)	On Request
	1000 A*	LV510530 (Set of 12)	On Request	LV510540 (Set of 16)	On Request
	1250 A	LV512530 (Set of 6)	On Request	LV512540 (Set of 8)	On Request

* Two runs per phase



EasyPact Extended Rotary Handle

Rated Current	Reference	Unit MRP [₹]
800 A	LV500500	On Request
1000 A	LV500500	On Request
1250 A	LV500500	On Request




EasyPact External Neutral CT

Rated Current	Reference	Unit MRP [₹]
800 A	LV508560	On Request
1000 A	LV510560	On Request
1250 A	LV512560	On Request

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

✓ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026



**Adaptor kit for
External Neutral CT**

Rated Current	Reference	Unit MRP [₹]
800 A	LV508570	On Request
1000 A	LV510570	On Request
1250 A	LV512570	On Request



**Auxiliary 1 C/O + Trip Alarm
Contact 1 C/O**

Rated Current	Reference	Unit MRP [₹]
800 A	LV500604	On Request
1000 A		On Request
1250 A		On Request



Auxiliary Switch 1 C/O

Rated Current	Reference	Unit MRP [₹]
800 A	LV500601	On Request
1000 A	LV500601	On Request
1250 A	LV500601	On Request



**Shunt Release
(110/240/415 V AC)**

Rated Current	Reference	Unit MRP [₹]
800 A	LV500605	On Request
1000 A	LV500605	On Request
1250 A	LV500605	On Request



Auxiliary Switch 2 C/O

Rated Current	Reference	Unit MRP [₹]
800 A	LV500602	On Request
1000 A	LV500602	On Request
1250 A	LV500602	On Request



**Under Voltage release
(240 V AC)**

Rated Current	Reference	Unit MRP [₹]
800 A	LV500606	On Request
1000 A	LV500606	On Request
1250 A	LV500606	On Request



Trip Alarm Contact

Rated Current	Reference	Unit MRP [₹]
800 A	LV500603	On Request
1000 A	LV500603	On Request
1250 A	LV500603	On Request




ComPacT NSX

Molded-Case Circuit Breakers
And Switch-Disconnectors
From 16 To 630 A - Up To 690 V





Environmental Data Program

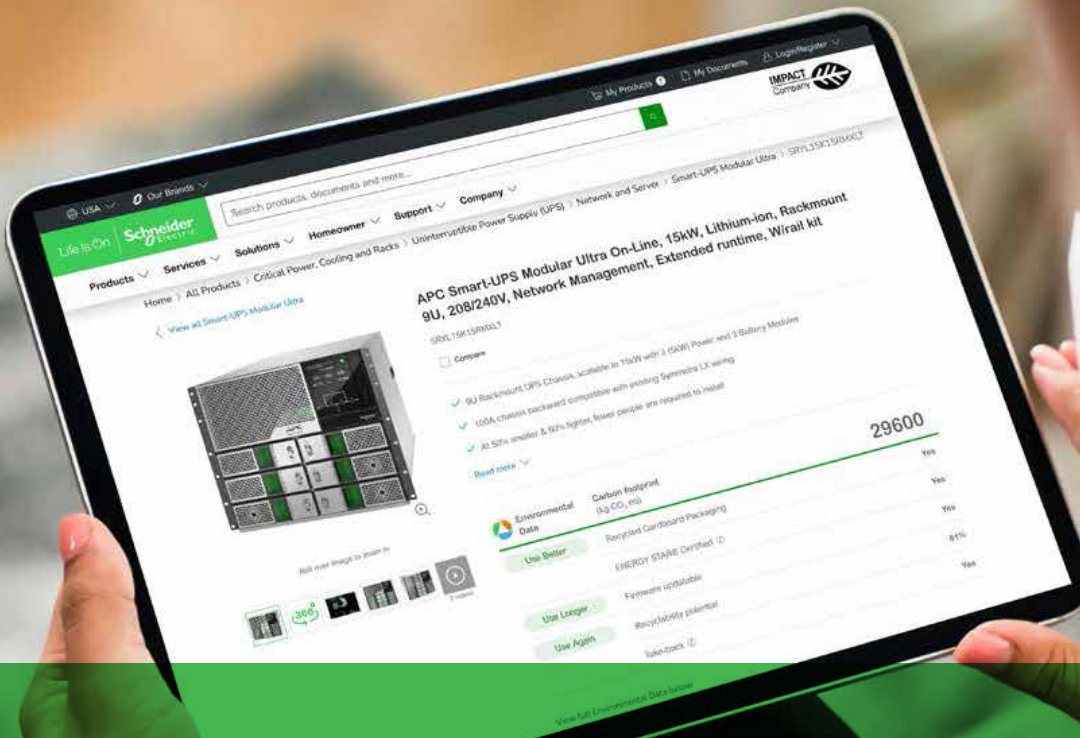


Next-level transparency for better-informed product choices

The Environmental Data Program is a framework for how we measure, categorize, and compare the environmental attributes and footprint of our products.

Using a rigorous, fact-based methodology, the program provides environmental data from across the product lifecycle.

Five data categories across the product lifecycle

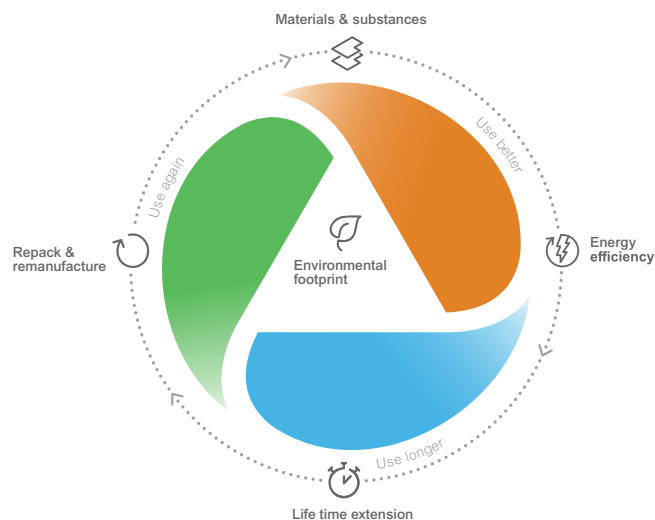

Use Better: How sustainable a product is, including environmental footprint, materials and substances, packaging, and energy efficiency.

Use Longer: How a product's life time can be effectively extended in terms of reparability and updatability.

Use Again: How a product can be reused, from dismantling and remanufacturing to recyclability and manufacturer take back.

With this transparent, verified data, customers and partners are empowered to make conscious environmental choices and accurately evaluate and report on sustainability performance.

All our hardware offers have an associated environmental data available on se.com product pages.



ComPact NSX

Schneider Electric is proud to introduce the new generation of ComPacT MCCBs. These breakers talk to you, wherever you are, in all transparency. New design complements new wireless connectivity capabilities with our latest wireless auxiliary contact.

ComPact Design



New signature design

- Schneider Electric green signature style for the entire ComPacT range
- Estimated 40% reduction of wiring time for panel builders
- Experience easier installation thanks to a new ergonomic front-plate design
- Gain the confidence that all auxiliaries are on the right spot, and simply double check that you have the right coil rating
- Ergonomic new toggle for easier breaker manual operation


Wireless Auxiliary Contact



Wireless breaker status

- Plug & play technology for clear connection status (0 or 1, no half-way wired)
- Placed in the same position as the wired version, its LED light will give you direct indication in case of a tripping
- If you are away, your ComPacT will send you an immediate notification via EcoStruxure Facility Expert for instance
- Wireless auxiliary accelerates overall wiring time: status communication is done very simply and commissioned wirelessly
- Communication architecture is fully EcoStruxure Power validated, with any application

Ready to meet the new face of ComPacT?



Meet the new generation of ComPacT™ circuit breakers with semi-transparent faceplate, screwless auxiliaries and remote monitoring features.

Learn about the benefits of the ComPacT range here:
se.com/compact-nsx

COMPACT

Moulded Case Circuit Breaker



The new generation of reliable ComPacT circuit breakers features improved performance and easier installation.

- Gain a competitive edge with easy-to-upgrade, wireless connectivity of circuit breakers and panels.
- Experience easier installation thanks to a new ergonomic front-plate design.
- Improve build and installation times with screwless, plug-and-play auxiliaries.



ComPacT™ molded-case circuit breaker

se.com/compact-nsx



New BCSM Modbus SL/ULP


Simplify your
path to **digital**

se.com/in

Schneider
Electric

© 2024 Schneider Electric. All rights reserved. All trademarks are the property of Schneider Electric SAS or its affiliated companies.


Current architecture

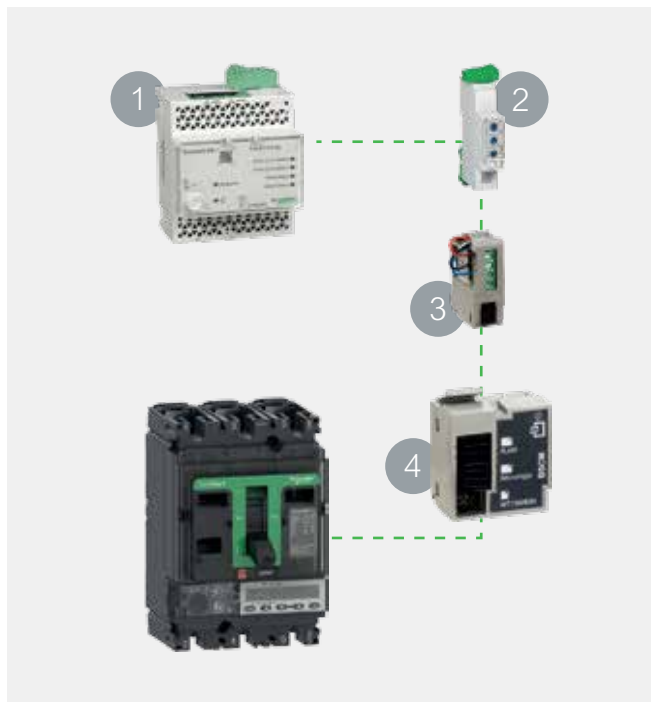

1. IFE LV434001
2. IFM v2 LV4340000

3. NSX cord LV434201
4. BSCM LV434205

Solution with new BSCM

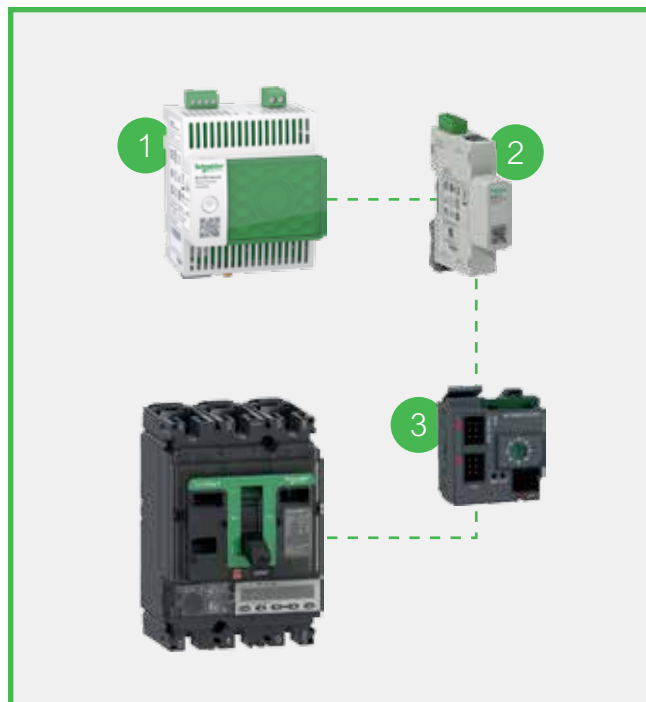

1. Panel Server PAS600L
2. Modbus SL Hub LV434224

3. BSCM Modbus SL/ULP LV434220



Connectivity of the future with **BSCM Modbus SL/ULP**

- ✓ Connect with ULP and Modbus SL protocols
- ✓ Effortless setup with Plug & Play RJ45 connection
- ✓ Easy installation thanks to its simple architecture with Modbus SL Hub
- ✓ Empowers sustainability by reducing carbon footprint
- ✓ Cost-effective solution for connectivity

Compatibility with **EcoStruxure Power Commission**

Integrate seamlessly with EPC, boosting setup, testing, and overall process speed and accuracy. Get your projects running faster and more reliably, leaving the competition in the dust.





NSX Thermal Magnetic Trip Unit (TM-D)

- BIS Certified 
- $I_{cs} = 100\% I_{cu}$ as per IEC 60947-2
- Adjustable thermal setting 0.7 to $1 \times I_n$
- Adjustable magnetic setting 5 to $10 \times I_r^{**}$
- Transparent cover for trip unit as standard

Breaking Capacity I_{cu} as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
25kA	16A	C10B3TM016	16310	C10B6TM016	23410
	25A	C10B3TM025 	16310	C10B6TM025	23410
	32A	C10B3TM032 	16310	C10B6TM032	23410
	40A	C10B3TM040 	16310	C10B6TM040	23410
	50A	C10B3TM050	16310	C10B6TM050	23410
	63A	C10B3TM063 	16310	C10B6TM063 	23410
	80A	C10B3TM080 	16310	C10B6TM080	23410
	100A	C10B3TM100 	16310	C10B6TM100 	23410
	125A	C16B3TM125 	28890	C16B6TM125 	35580
	160A	C16B3TM160 	30900	C16B6TM160 	38770
	200A	C25B3TM200	44520	C25B6TM200 	53560
	250A	C25B3TM250 	45390	C25B6TM250 	54620
36kA	16A	C10F3TM016 	19850	C10F6TM016	25140
	25A	C10F3TM025 	19850	C10F6TM025	25140
	32A	C10F3TM032 	19850	C10F6TM032 	25140
	40A	C10F3TM040 	19850	C10F6TM040	25140
	50A	C10F3TM050	19850	C10F6TM050	25140
	63A	C10F3TM063 	19850	C10F6TM063 	25140
	80A	C10F3TM080 	19850	C10F6TM080	25140
	100A	C10F3TM100 	19850	C10F6TM100 	25140
	125A	C16F3TM125 	29670	C16F6TM125 	36960
	160A	C16F3TM160 	31150	C16F6TM160 	39860
	200A	C25F3TM200 	45100	C25F6TM200 	55580
	250A	C25F3TM250 	46390	C25F6TM250 	57820
50kA	16A	C10N3TM016	23620	C10N6TM016	29610
	25A	C10N3TM025	23620	C10N6TM025	29610
	32A	C10N3TM032 	23620	C10N6TM032	29610
	40A	C10N3TM040 	23620	C10N6TM040	29610
	50A	C10N3TM050	23620	C10N6TM050	29610
	63A	C10N3TM063 	23620	C10N6TM063	29610
	80A	C10N3TM080 	23620	C10N6TM080	29610
	100A	C10N3TM100 	23620	C10N6TM100	29610
	125A	C16N3TM125 	35680	C16N6TM125	41030
	160A	C16N3TM160 	36440	C16N6TM160	43080
	200A	C25N3TM200 	48610	C25N6TM200	59390
	250A	C25N3TM250 	49540	C25N6TM250	63000
70kA	16A	C10H3TM016	29910	C10H6TM016	38570
	25A	C10H3TM025	29910	C10H6TM025	38570
	32A	C10H3TM032	29910	C10H6TM032	38570
	40A	C10H3TM040	29910	C10H6TM040	38570
	50A	C10H3TM050	29910	C10H6TM050	38570
	63A	C10H3TM063 	29910	C10H6TM063	38570
	80A	C10H3TM080	29910	C10H6TM080	38570
	100A	C10H3TM100 	29910	C10H6TM100	38570
	125A	C16H3TM125	55660	C16H6TM125	59140
	160A	C16H3TM160 	56250	C16H6TM160	60340
	200A	C25H3TM200	63940	C25H6TM200	83080
	250A	C25H3TM250 	64560	C25H6TM250	83920

Note:

- ** applicable for NSX 200A & 250A
- For higher breaking capacities (100kA and 150kA); for Generator Protection MCCB and other special application MCCB, contact our nearest Sales office.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

 NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

**NSX Micrologic 2 (μP -ASIC based)**

- BIS Certified 
- Protection type LS01N
- Ics = 100% Icu as per IEC 60947-2
- Adjustable overload from 0.40 to 1 x In
- Adjustable short circuit from 1.5 to 10 x Ir
- Innovative front indication LED's (Ready, Overload pre-alarm & Overload)
- Two frame sizes up to 630A
- Adjustable neutral protection - N, N/2, OFF for 4 Pole MCCB

Breaking Capacity Icu as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
25kA	40A	C10B32D040 	30220	C10B42D040	38880
	100A	C10B32D100 	30220	C10B42D100 	38880
	160A	C16B32D160 	38580	C16B42D160 	49220
	250A	C25B32D250 	50700	C25B42D250 	65040
36kA	40A	C10F32D040	30720	C10F42D040	39060
	100A	C10F32D100 	30720	C10F42D100 	39060
	160A	C16F32D160 	39270	C16F42D160 	54270
	250A	C25F32D250 	53090	C25F42D250 	73570
	400A	C40F32D400 	80210	C40F42D400 	91450
	630A	C63F32D630 	85160	C63F42D630 	108940
50kA	40A	C10N32D040	36850	C10N42D040	49850
	100A	C10N32D100 	36850	C10N42D100 	51330
	160A	C16N32D160 	46680	C16N42D160	60730
	250A	C25N32D250 	60640	C25N42D250 	78810
	400A	C40N32D400 	83110	C40N42D400 	107940
70kA	630A	C63N32D630 	86150	C63N42D630 	114100
	40A	C10H32D040	46080	C10H42D040	58350
	100A	C10H32D100	46780	C10H42D100	58350
	160A	C16H32D160	61780	C16H42D160	78850
	250A	C25H32D250	69390	C25H42D250	100140
	400A	C40H32D400 	93680	C40H42D400	123020
	630A	C63H32D630 	95980	C63H42D630	149320


Note: For higher breaking capacities (100kA and 150kA); for Generator Protection MCCB and other special application MCCB, contact our nearest Sales office.

**NSX Micrologic 2 (μP -ASIC based) / TMD / MA+ shunt +GFP**

- Protection type LS01GN
- Ics = 100% Icu as per IEC 60947-2
- Fault indication for GF (LED type) meant for human safety
- Adjustable overload from 0.36 to 1 x In
- Adjustable short circuit from 1.5 to 10 x Ir
- Adjustable earth fault sensitivity selection 10 to 60%
- Innovative front indication LED's (Ready, Overload pre-alarm & Overload)
- Two frame sizes up to 630A
- Suitable for 3P3W & 3P4W electrical distribution network
- Breaking Capacity enhancement upto 150kA with a higher capacity upstream (Cascading)
- Adjustable neutral protection - N, N/2, OFF for 4 Pole MCCB

MCCB Frame	Relay Module rated current	3 Ph + 3W Reference	Unit MRP [₹]	3 Ph + 4W Reference	Unit MRP [₹]
CVS/NSX100	32, 40, 50, 63, 80, 100	GFP11CT13P 	9250	GFP11CT14P 	10130
CVS/NSX 160 / 250	125, 160, 200, 250	GFP12CT23P 	10500	GFP12CT24P 	11870
CVS/NSX 400 / 630	400, 630	GFP13CT33P 	15900	GFP13CT34P 	17350

Note: Kindly order NSX/CVS MCCB +GFP+. Shunt trip coil.

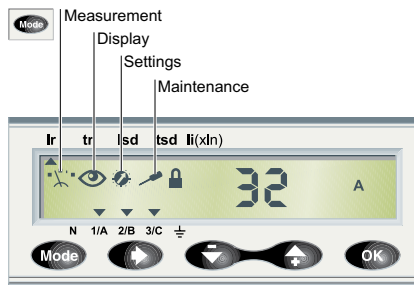

NSX Micrologic 6A

Protection

- BIS Certified 
- $I_{cs} = 100\% I_{cu}$ as per IEC 60947-2
- External Neutral CT required for highly un-balanced TP-N system (* has to be ordered at extra price)
- Adjustable neutral protection - N, N/2, OFF and oversized neutral (standard feature) for 4 Pole MCCB.
- Adjustable overload from I_r 0.4 to $1 \times I_n$ and $t_r = 0.5$ to 16 s
- Adjustable short circuit from I_{sd} 1.5 to $10 \times I_r$ and $t_{sd} I_{2t}$ ON/OFF 0.1 to 0.4s
- Adjustable earth fault 0.4 to $1 \times I_n$ (for $I_n=40A$) & 0.2 to $1 \times I_n$ (for $I_n>40A$) and $t_g I_{2t}$ ON/OFF 0.1 to 0.4s
- Instantaneous protection I_i 1.5 $\times I_n$ to 15 $\times I_n$ (40 - 160A), 12 $\times I_n$ (250 to 400A) and 11 $\times I_n$ (630A)
- Zone Selective Interlocking (ZSI) as standard

Measurement & Diagnostics

- Current measurement, communication capable as standard
- Demand and maximum demand values
- Indications for fault types, alarms and histories with timestamping
- Fault distinction on the display of trip unit (type of fault, interrupted fault current and faulty phase)
- Operation, trip and alarm counters; Operating Hours counter
- Contact wear, Load profile and thermal image

Breaking Capacity I_{cu} as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
36kA	100A	C10F36A100	On Request	C10F46A100	On Request
	160A	C16F36A160	On Request	C16F46A160	On Request
	250A	C25F36A250	On Request	C25F46A250	On Request
	400A	C40F36A400	On Request	C40F46A400	On Request
	630A	C63F36A630	On Request	C63F46A630	On Request
50kA	100A	C10N36A100	On Request	C10N46A100	On Request
	160A	C16N36A160	On Request	C16N46A160	On Request
	250A	C25N36A250	On Request	C25N46A250	On Request
	400A	C40N36A400	On Request	C40N46A400	On Request
	630A	C63N36A630	On Request	C63N46A630	On Request
70kA	100A	C10H36A100	On Request	C10H46A100	On Request
	160A	C16H36A160	On Request	C16H46A160	On Request
	250A	C25H36A250	On Request	C25H46A250	On Request
	400A	C40H36A400	On Request	C40H46A400	On Request
	630A	C63H36A630	On Request	C63H46A630	On Request

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

 NORMAL STOCK ITEMS

W.E.F. January 15th, 2026



NSX Magnetic Trip Unit MA type

- BIS Certified 
- Ics = 100% Icu as per IEC 60947-2
- Adjustable magnetic setting Im 6 to 14 x In (2.5 to 100A) & 9 to 14 x In (150 to 200A)
- Type - 2 Co-ordination charts upto 110 kW at 400V
- Adjustable neutral protection - N, N/2, OFF for 4 Pole MCCB

Breaking Capacity Icu as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]
36kA	150A	C16F3MA150	32210
36kA	220A	C25F3MA220	52870
50kA	150A	C16N3MA150	39340
50kA	220A	C25N3MA220	58020
70kA	150A	C16H3MA150	58470
70kA	220A	C25H3MA220	90650



MCCBs for DC Network Protection

16A to 1200A in Two frames sizes with Thermal Magnetic Trip Unit (TMD)

- Up to 1200 A for ComPact NSX DC, protection is provided by thermal-magnetic trip units
- TM-D up to 160 A: fixed thermal threshold and magnetic pick-up
- TM-D up to 63 A: adjustable thermal threshold and fixed magnetic pick-up
- TM-DC from 80 to 250 A: fixed or adjustable (for 200 and 250 A) magnetic pick-up and adjustable thermal threshold
- TM-DC from 250 A to 1200 A adjustable magnetic pick-up and adjustable thermal threshold
- TM-G, up to 250 A: adjustable thermal threshold and fixed low magnetic pick-up to protect long cables

Breaking Capacity Icu as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
36kA	400A	C40F3TM400D	65270	C40F4TM400D	74120
36kA	500A	C63F3TM500D	78300	C63F4TM500D	91170
36kA	600A	C63F3TM600D	82690	C63F4TM600D	100130
100kA	400A	C40S3TM400D	88780	C40S4TM400D	108130
100kA	500A	C63S3TM500D	96920	C63S4TM500D	116920
100kA	600A	C63S3TM600D	96920	C63S4TM600D	116920

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

 NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

**MCCB for 800V AC & 1000V AC**

- As per IEC 60947-2
- NSX Micrologic Trip unit LSol
- Icu, 36kA at 800V AC, 10kA at 1000V AC

Description	Reference	Unit MRP [₹]
NSX400K, 36kA at 800V AC, 10kA at 1000V AC, 3P3D 250A 2.3	C40K32D250	On Request
NSX400K, 36kA at 800V AC, 10kA at 1000V AC, 3P3D 400A 2.3	C40K32D400	On Request
NSX400K, 36kA at 800V AC, 10kA at 1000V AC, 4P4D 250A 2.3	C40K42D250	On Request
NSX400K, 36kA at 800V AC, 10kA at 1000V AC, 4P4D 400A 2.3	C40K42D400	On Request

It is mandatory to install long terminal shields with lugs and bars

Description	Reference	Unit MRP [₹]
3P Long terminal shield with 52.2mm pitch	LV432595	On Request
4P Long terminal shield with 52.2mm pitch	LV432596	On Request



Indication contacts



SDTAM remote indication relay module



SDx remote indication relay module



Voltage Release



Motor Mechanism

Description	Reference	Unit MRP [₹]
Auxiliary contacts (changeover) Multifunction		
OF or SD or SDE or SDV	29450 ☒	1310
OF or SD or SDE or SDV low level	29452	1590
SDE adaptor for trip unit TM or MA or Micrologic 2 \$\$	LV429451 ☒	1210
SDX 2-PROGRAMMABLE CONTACTS FOR MICROLOGIC		
SDx module 24/415 V AC/DC	LV429532	20370
SDTAM contactor tripping module for Micrologic 2- M/6 E-M		
SDTAM 24/415 V AC/DC overload fault indication	LV429424	21340

\$\$ To be considered along with SDE contact for MCCB with TMD/MA./Micrologic 2 protection.

Voltage Releases

Description	Shunt Release Reference	Unit MRP [₹]	Undervoltage Reference	Unit MRP [₹]
AC				
24 V 50/60 Hz	LV429384	3780	LV429404	4690
48 V 50/60 Hz	LV429385	3880	LV429405	4810
110-130 V 50/60 Hz	LV429386 ☒	3780	LV429406 ☒	4690
220-240 V 50/60 Hz	LV429387 ☒	3780	LV429407 ☒	4690
380-415 V 50 Hz	LV429388 ☒	3780	LV429408 ☒	4690
525 V 50 Hz	LV429389	3880	LV429409	6890
DC				
12 V	LV429382	3780	LV429402	4750
24 V	LV429390 ☒	3780	LV429410 ☒	4640
30 V	LV429391	3880	LV429411	6890
48 V	LV429392	3780	LV429412	4750
60 V	LV429383	5500	LV429403	6720
125 V	LV429393	3780	LV429413	4640
250 V	LV429394	3780	LV429414 ☒	4600

Installation Accessories

Description	100/160/250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Spreaders & Phase Barrier				
Spreaders (Set of 3) 3P	LV431563 ☒	980	32492 ☒	2630
Spreaders (Set of 4) 4P	LV431564 ☒	1300	32493 ☒	3290
Phase Barrier (Set of 6)	*	-	LV432570 ☒	1240
Interlocking				
For Breaker with Rotary Handle	LV429369	14240	LV432621	18010
For Breaker with Toggle	LV429354	17540	LV432614	18190
Mechanical Interlocking with Base Plate	29349**	-	32609**	-
Locking of Rotary Handle				
Locking Device	LV429344 ☒	920	LV432604 ☒	1240
Ronis Keylock (1 Lock + 1 Key set)	41940 ☒	13680	41940 ☒	13680
Ronis Keylock (2 Locks + 1 Key set)	41950 ☒	19620	41950 ☒	19620
Profalux Keylock (1 Lock + 1 Key set)	42888	12050	42888	12050
Profalux Keylock (2 Locks + 1 Key set)	42878	19620	42878	19620

* supplied as standard with spreader

** Mechanical Interlocking with Base Plate to be ordered with Safety trip interlock (LV429270 for 29349 and LV432520 for 32609)

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026



FDM121: Front Display Module



Test Battery



Power Supply ModuleB



BSCM Modbus SL/ULP

Motor Mechanism

Type	Voltage	100/160A Reference	Unit MRP [₹]	250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Motor Mechanism Modules with SDE Adaptor ⁽¹⁾							
AC 50/60 Hz	48-60 V	LV429440	46400	LV431548	51280	LV432639	61080
	110-130 V	LV429433	38020	LV431540	41820	LV432640	61080
	220-240 V	LV429434 ✓	39100	LV431541 ✓	43210	LV432641 ✓	62810
	380-415 V	LV429435	38020	LV431542	42020	LV432642	60830
	440-480 V	LV429435	38020	LV431542	42020	LV432647	60780
DC	24-30 V	LV429436	52080	LV431543	56480	LV432643	74620
	48-60 V	LV429437	52080	LV431544	56480	LV432644	74620
	110-130 V	LV429438	52080	LV431545	56480	LV432645	74620
	250 V	LV429439	52080	LV431546	56480	LV432646	74620

(1) With every Motor Mechanism, please order 1 no. auxiliary contact additionally. For other voltages of motor mechanism please consult Customer Care.

Description	100/160/250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Locking of Motor Mechanism				
Keylock adaptor + Ronis keylock (special)	LV429449	5270	-	-
Locking Device	-	-	LV432649	1870
Ronis Keylock	-	-	41940 ✓	13680
Profalux Keylock	-	-	42888	12050
Torque Limiting Screws (Set of 12)	LV429513	4230	LV432513	4610

Monitoring and Control, test tools- ComPact and NSX100 - 630

Monitoring and Control (Remote Operation)

Description	Reference	Unit MRP [₹]
ULP Display Module		
Switchboard front display module FDM121	TRV00121 ✓	20930
Modbus SL Wiring Accessories NEW		
ComPacT NSX BSCM Modbus SL Cord .33m	LV424221	On Request
ComPacT NSX BSCM Modbus SL Cord 1.3m	LV434222	1690
5 RJ45/RJ45 MALE Cord L = 1m	TRV00810	4370
10 Stacking connectors for COM interface	TRV00217	7130
Modbus SL/ULP NEW		
Modbus SL Hub	LV434224	4510
ComPacT NSX BSCM Modbus SL/ULP	LV434220	11300
Power Supply Modules		
External power supply module 24 V DC-1 A OVC IV		
200-240 V AC	LV454444 ✓	24890
Pocket battery for Micrologic NSX100-630	LV434206	30450

Maintenance Module for advanced configuration and testing, contact our nearest Sales office.

ULP = Universal Logic Plug

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

✓ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

New Gen-Direct
Rotary HandleNew Gen-Extended
Rotary Handle

Plug in Base



Draw-Out Chassis Kit

Description	100/160/250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Rotary Handles				
Standard direct black handle	LV429337T ☒	1920	LV432597T ☒	2890
Standard extended rotary handle	LV429338T ☒	2630	LV432598T ☒	4680
Plug in Base (Complete Kit)				
3 Pole	LV429289 ☒	15520	LV432538 ☒	36640
4 Pole	LV429290 ☒	20110	LV432539 ☒	45670
Draw-Out Chassis Kit				
3 Pole				
Plug In base	LV429289 ☒	15520	LV432538 ☒	36640
Chassis Side Plate for base	LV429282 ☒	20510	LV432532 ☒	25960
Chassis Side Plate for breaker	LV429283 ☒	10880	LV432533 ☒	15140
4 Pole				
Plug In base	LV429290 ☒	20110	LV432539 ☒	45670
Chassis Side Plate for base	LV429282 ☒	20510	LV432532 ☒	25960
Chassis Side Plate for breaker	LV429283 ☒	10880	LV432533 ☒	15140
Plug In / Withdrawable version Accessories				
Automatic Auxilliary Connectors				
1 9-wire fixed connector (for base)	LV429273	2160	LV429273	2160
1 9-wire moving connector (for circuit breaker)	LV429274	1510	LV432523 ☒	1630
1 support for 2 moving connectors	LV429275	1160	LV432525 ☒	1160
Manual Auxilliary Connectors				
9-wire manual auxiliary connector (fixed + moving)	LV429272	7280	LV429272	7280

Note: Above auxiliary connectors to be used with Plug-in and Withdrawable MCCB when Auxiliary Contact, Shunt, UnderVoltage or Motor Mechanism is used.

Unique Modular Ground Fault Protection



Earth Fault Protection for EasyPact CVS/ ComPact NSX MCCBs Modular Device for EasyPact CVS/ ComPact NSX Range Moulded Case Circuit Breakers

- Adjustable earth fault sensitivity selection 10 to 60%
- Adjustable time delay Inst/ 0.5 - 3 sec.
- System healthiness check through LED indication
- Individual fault indication for OL/SC, EF when used with ComPact NSX & EasyPact CVS (Optional)
- Test facility to check healthiness of earth fault protection system without tripping MCCB
- Suitable for 3P3W & 3P4W electrical distribution network

MCCB Frame	Relay Module rated current	3 Ph + 3W Reference	Unit MRP [₹]	3 Ph + 4W Reference	Unit MRP [₹]
CVS/NSX100	32, 40, 50, 63, 80, 100	GFP11CT13P ☒	9250	GFP11CT14P ☒	10130
CVS/NSX 160 / 250	125, 160, 200, 250	GFP12CT23P ☒	10500	GFP12CT24P ☒	11870
CVS/NSX 400 / 630	400, 630	GFP13CT33P ☒	15900	GFP13CT34P ☒	17350

Note: Kindly order one no. Shunt trip coil along with one Ground Fault Protection Module for CVS100 to 630.

Earth Leakage Protection

ComPact NSX VigiPacT Add-on Module



VigiPacT

NSX + VigiPacT

- Compliance with Standards - IEC60947-2 annex B, IEC 60755, Type A, immunity to DC components up to 6 mA
- Sensitivity In (A)-0.03, 0.1, 0.3, 0.5, 1, 3
- Time delay (ms)-0, 60, 150, 300, 500, 800, 1.2s, 4s
- VigiPacT add-on may be equipped with an auxiliary contact (SDV) to remotely signal tripping due to an earth fault
- Self powered - "no external supply required"

MCCB Frame	Three Pole ⁽¹⁾ Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
NSX - 100/160	LV429488 ☒	32710	LV429489	36140
NSX - 250	LV429492	36060	LV429493	36870
NSX - 400/630	LV432464	89290	LV432465	95620

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

[New] PacT Series


ComPacT NS

Molded Case Circuit Breakers
and Switch-Disconnectors
from 630b to 1600 A





Environmental Data Program

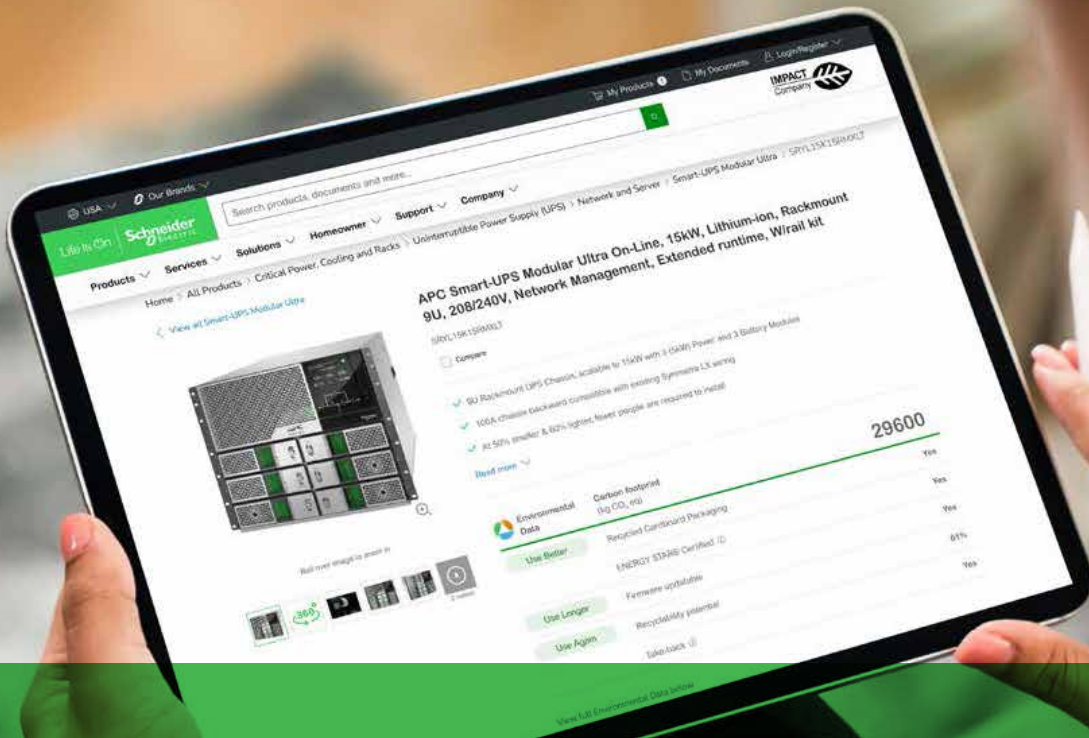


Next-level transparency for better-informed product choices

The Environmental Data Program is a framework for how we measure, categorize, and compare the environmental attributes and footprint of our products.

Using a rigorous, fact-based methodology, the program provides environmental data from across the product lifecycle.

Five data categories across the product lifecycle

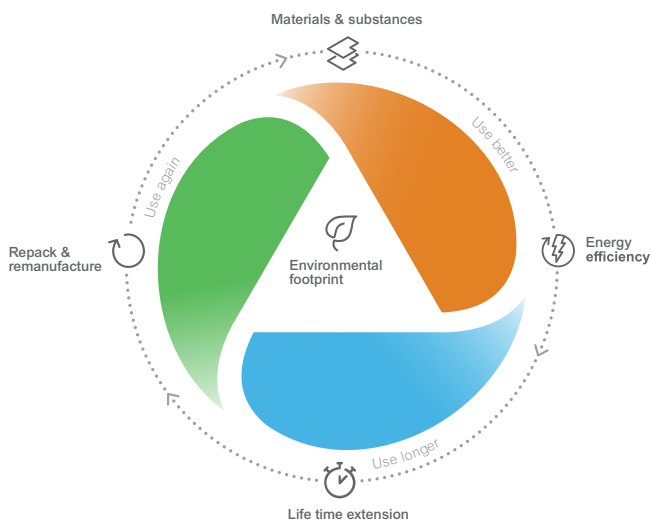

Use Better: How sustainable a product is, including environmental footprint, materials and substances, packaging, and energy efficiency.

Use Longer: How a product's life time can be effectively extended in terms of reparability and updatability.

Use Again: How a product can be reused, from dismantling and remanufacturing to recyclability and manufacturer take back.

With this transparent, verified data, customers and partners are empowered to make conscious environmental choices and accurately evaluate and report on sustainability performance.

All our hardware offers have an associated environmental data available on se.com product pages.



Micrologic Control Units - Salient Features

Circuit breakers and switch-disconnectors from 800 to 1600A


- Category B MCCBs
- Ethernet based monitoring, control, alarm notification for energy, asset and network management
- Built-in energy metering with combined accuracy class of 2% for improved energy efficiency
- Total Discrimination
- With Micrologic Trip Units (Common for ACBs & MCCBs) - Unique Feature
- Available in both fixed & drawout versions, manually & electrically operated



Micrologic

With Micrologic 2.0


- LED overload alarm indicator
- Test Facility
- Adjustable neutral protection
- N, N/2, OFF for 4 Pole MCCBs
- Adjustable overload (Ir) 0.4 to 1 x In
- Adjustable short circuit
(Instantaneous) 1.5 to 10 x Ir



Micrologic A

Micrologic 6.0.A Manual & Electrical Fixed

- Features over and above Micrologic 2.0
- Earth fault protection 0.3 to 1 x In (for In < 400A) & 0.2 to 1 x In (for 400A < In < 1250A), 500A to 20A x In (for In >= 1250A), time setting I2t ON/OFF 0.1 - 0.4s and time delay
- With ammeter display & bargraph (unique feature of Schneider MCCB)
- Internal fault (Ap), Individual fault indication by LED
- Zone Selective Interlocking
- Optional Communication



Micrologic E

Micrologic 6.0E (Embedded Energy Metering)

- Features over and above Micrologic 6.0 A
- Current measurement: Ammeter, current demand,
- Voltages (ph-ph, ph-N & unbalance), Power (P,Q,S), power factor, power demand, Energy (Ep, Eq, Es)



Micrologic P

Micrologic 6.0P

- Micrologic P control units include all the functions offered by Micrologic E
- Measure voltages and calculate power and energy values
- New protection functions based on currents, voltages, frequency
- Power reinforce load protection in real time.

New Gen Compact NS Reference



C080N320FME_IN

India

ComPacT 800A 50kA 3P Mic 2.0 Fixed Manual Extended Rotary

063
080
100
125

N:50kA
H:70kA

4P

20-LSI
60-LSIG
6E:LSIG+E
6A:LSIG+A

F : Fixed+Front
connection

Nothing: Toggle

E: Extended rotary
D: Direct rotary

N:220V AC electrical
operated (Manual option
will not be present)

Breaking Capacity Icu as per IEC 60947-2	Current Rating	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
50kA	800A	C080N320FME_IN	On Request	C080N420FME_IN	On Request
	800A	C080N36AFME_IN	On Request	C080N46AFME_IN	On Request
	800A	C080N320FMD_IN*	On Request	C080N46EFME_IN*	On Request
	800A	C080N320FN_IN**	On Request	C080N420FN_IN	On Request
70kA	800A	C080H320FME_IN	On Request	C080H46AFME_IN	On Request
	800A	C080H36AFME_IN	On Request	-	-
50kA	1000A	C100N320FME_IN	On Request	C100N420FME_IN	On Request
	1000A	C100N36AFME_IN	On Request	C100N46AFME_IN	On Request
	1250A	C125N320FME_IN	On Request	C125N420FME_IN	On Request

Note: References for different rating & combination, reach out to Schneider Electric representative

* Direct rotary handle

** 220V AC Electrical operated

EasyPact EZC

Safe, Reliable and Easy



With just three sizes of circuit breakers, Schneider Electric's **EasyPact EZC** system is the simple, universal solution, particularly adapted to Buildings and OEM segments

- Suitability for Isolation ensures safety
- Compliance to RoHS (Restriction of Hazardous Substances) for environment safety

Range Details:

- Global MCCB offer from 15A to 600A
- Operating voltage upto 550VAC
- 1P, 2P, 3P and 4P versions available
- EZC AC version is suitable for DC applications upto 250V DC (15A to 250A breaking capacity up to 30kA)

Note: Connect with Schneider Electric Representative to know more.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☑ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Earth Leakage Protection is obtained by:

- Installing a Micrologic 7.0.A control unit (ComPact NS800 - 3200A/ MasterPact NT/NW ACB)
- Using Vigirex Relays and separate Toroids or Rectangular Sensors

Vigirex Relays



Vigirex Relays along with Vigirex Sensors, may be used to add external Earth Leakage Protection to Circuit Breakers

- Sensitivity Adjustments from 30mA to 30A and time delay settings from (0-4.5 seconds)
- Closed Toroid up to 630A (30 to 300mm in diameter), Split Toroid up to 250A (46 to 110mm in diameter) or
- Rectangular sensor up to 3200A
- 400Hz Distribution System

Note: For further details, please contact our nearest Sales Office.

Type	Control Voltage	Din rail mount Reference	Unit MRP [₹]	Front panel mount Reference	Unit MRP [₹]
RH10 with local manual fault reset	220/240VAC	56130	20060	56230	22030
Sensitivity=0.03A	380/415VAC	56140	20060	56240	31150
RH99 with local manual fault reset	220/240VAC	56173	30300	56273	32790
Sensitivity = 0.03- 30A & time delay= 0-4.5s	380/415VAC	56174	33410	56274	34440
RH197P with local manual or automatic fault reset	220/240VAC		-	56507*	37080
Sensitivity = 0.03- 30A & time delay= 0-4.5s	380/415VAC		-	56508*	84950
RH197P with local manual or automatic fault reset	220/240VAC		-	56512**	81730
Sensitivity = 0.03- 30A & time delay= 0-4.5s	380/415VAC		-	56513**	39320

* alarm at 50% of fault threshold

** alarm at 100% of fault threshold

Vigirex Sensors



Type	Ie(A) Rated Operational Current	Inside Diameter (mm)	Reference	Unit MRP [₹]
TA30	65	30	50437	12800
PA50	85	50	50438	17830
IA80	160	80	50439	21210
MA120	250	120	50440	25510
SA200	400	200	50441	39640
GA300	630	300	50442	82610

Note: For vigirex relay with monitoring and communication facility, contact nearest sales office.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

✓ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026



For Low Voltage Circuit Control and Isolation - Incomers for Distribution Boards

- Conforms to IEC 60947-3/IS 13947 - 3
- Rated operational voltages 500V/690V
- Range 40A to 2500A
- Rated operational current @ AC 23A
- No deration upto 60° C
- Positive contact indication
- Common accessories with ComPact NSX/single auxiliary contact
- Making capacity enhanced with ComPact NSX upstream

Pole Description	Rated Operational Current	Reference	Unit MRP ₹
Interpact Range of Switch Disconnectors			
3-Pole	40 A AC-23A	28900	8390
	63 A AC-23A	28902	10130
	100 A AC-23A	28908	11940
	125 A AC-23A	28910	13340
	160 A AC-23A	28912	14500
	200 A AC-23A	31102	25210
	250 A AC-23A	31106	26620
	320 A AC-23A	31108	43370
	400 A AC-23A	31110	48840
4-Pole	630 A AC-23A	31114	50270
	40 A AC-23A	28901	9370
	63 A AC-23A	28903	11090
	100 A AC-23A	28909	13030
	125 A AC-23A	28911	14520
	160 A AC-23A	28913	16030
	200 A AC-23A	31103	28840
	250 A AC-23A	31107	29560
	320 A AC-23A	31109	50230
4-Pole	400 A AC-23A	31111	51880
	630 A AC-23A	31115	58140
Interpact Changeover Systems (Complete Assembly)			
3-Pole	100 A AC-23A	31140	79350
	160 A AC-23A	31144	81540
	200 A AC-23A	31142	85820
	250 A AC-23A	31146	94250
	320 A AC-23A	31148	112150
	400 A AC-23A	31150	147730
	630 A AC-23A	31154	157890
4-Pole	100 A AC-23A	31141	80160
	160 A AC-23A	31145	84890
	200 A AC-23A	31143	87090
	250 A AC-23A	31147	102450
	320 A AC-23A	31149	137210
	400 A AC-23A	31151	151650
	630 A AC-23A	31155	160660

Description	Reference	Unit MRP ₹
Accessories		
Optional front extended rotary handle INS 250 - black handle (Switch Disconnector)	LV431050	7460
Optional front extended rotary handle INS 320..630 - black handle (Switch Disconnector)	31052	10520
Optional front extended rotary handle INS 40..160 - black handle (Switch Disconnector)	LV428941	3800
6 phase separators - INS100..160	28959	1670
6 phase separators - INS250	29329	1820
6 phase separators - INS400..630	LV432570	1240

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026



Fuse solutions from the world leader in electrical distribution

- The most complete fuse device offer in single and double break - switch disconnecter fuses, fuse switch disconnectors and disconnector fuses
- Double break and Single break offer.
- Short-circuit and overload protection
- Isolation
- On-load switching of circuits

Range Details: NX range Switch Disconnecter Fuse

- 32A to 630A TP, TPN & FP version suitable for DIN/BS fuses.
- 4 break and 8 arcing zones
- IP20 Fuse protection cover is standard.

Range Details: ISFT range Fuse Switch Disconnecter

- 100A to 630A TP, version suitable for DIN fuses.
- Single breaking and direct connection to busbars
- isolation with positive contact indication when the fuse-carrier assembly is in the open position (OFF).

Range Details: ISFL range Vertical Fuse Switch Disconnecter

- 160A to 1250A TP, version suitable for DIN fuses.
- Single breaking and direct connection to busbars
- Two versions i.e Single pole or Three pole operation

- Complete Range from 32 to 630A in TP, TP+N & FP version suitable for DIN/BS fuses.
- 4 breaks and 8 arcing points
- IP20 Fuse Protection Cover is standard
- Higher Mechanical and Electrical life.

Without Enclosure

Rated Operational Current	Poles Description	DIN Type Reference	Unit MRP [₹]
32 A	3P + N	NX032TPNDI ☒	4590
63 A	3P + N	NX063TPNDI ☒	6090
80 A	3P + N	NX080TPNDI	11490
100 A	3P	NX100TPXDI	12810
100 A	3P + N	NX100TPNDI ☒	13180
125 A	3P	NX125TPXDI ☒	14950
125 A	3P + N	NX125TPNDI ☒	16170
160 A	3P + N	NX160TPNDI ☒	17630
200A	3P + N	NX200TPNDI ☒	22640
250 A	3P	NX250TPXDI	26680
250 A	3P + N	NX250TPNDI ☒	27220
250 A	4P	NX250FPXDI	32610
315 A	3P + N	NX315TPNDI ☒	33700
400 A	3P + N	NX400TPNDI ☒	46110
630 A	3P	NX630TPXDI	66180
630 A	3P + N	NX630TPNDI ☒	67080

Accessories/Spares

Description	Reference	Unit MRP [₹]
NX032/NX063/NX080		
Auxiliary contact for FuPact	NXAA11 ☒	1220
Handle operating mechanism (HOM) NX032...NX080	NXR1	890
NX100/NX125/NX160		
Auxiliary contact for FuPact	NXBA11 ☒	1140
Fuse holder DIN for BS type NX100...NX160	NXHB21	440
Handle operating mechanism NX100...NX160	NXR2 ☒	1670
NX200		
Auxiliary contact for FuPact	NXBA11 ☒	1140
Fuse holder for BS type NX200	NXHB22	450
Fuse holder for DIN NX200	NXHD22	510
Handle operating mechanism NX200	NXR2 ☒	1670
NX250/315/400		
Auxiliary contact for FuPact	NXBA11 ☒	1140
Handle operating mechanism for NX250...NX400	NXR3	1730
NX630		
Auxiliary contact for FuPact	NXBA11 ☒	1140

Note: For other versions please contact our nearest Sales Office.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026



Future of Power Distribution

MasterPact MTZ with MicroLogic Active

LV Circuit Breakers & Switch Disconnectors
from 630A to 6300A



se.com/in

Life Is On

Schneider
Electric

A new digital user experience

With the MasterPacT MTZ active circuit breaker, every stage of the project - from designing and configuring to operating and maintaining - is streamlined using its digital capabilities.

DESIGN



EcoStruxure Power Design Software

Single-line diagram design software that calculates and sizes your electrical installation.

EcoStruxure Power Build Software

Quick configuration and quotation tool for switchboards.

Design with 3rd Party Software

Completely integrated with third party design software to enhance your work efficiency.

CONFIGURE AND ORDER



Product Selector

Configure MasterPacT MTZ to save time and ensure accuracy

BUILD AND COMMISSION



EcoStruxure Power Commission software

Commission and upgrade easily with protection setting and factory-acceptance test.

OPERATE AND MAINTAIN




EcoStruxure Power Monitoring Software

Power Monitoring Expert
Power SCADA Operation
Building Operation
Facility Advisor

se.com

Monitor with EcoStruxure Energy Hub Software



Operate with MicroLogic Active control unit

Locally in the facility room

Status "at a glance"



Remote, continuous notifications

Track facility data receive alerts in case of power events and scheduled maintenance.



Operate with your smartphone

Locally in the facility room



EcoStruxure Power Device App

Android



iOS



Select a MicroLogic Active Control Unit

Overview of functions

Measurement

Energy management is the challenge of present and future generations. To meet this requirement, MicroLogic Active incorporates all the measuring functions.

Protection

MicroLogic Active offers a large long-time delay setting range and protection accuracy for a wide temperature range (-25 to +70 °C).

Maintenance and Diagnostics

Optimal continuity of services as well as extended equipment life are among customers main concerns. For that purpose, MicroLogic Active control units contribute to corrective, preventive and predictive maintenance.



Communication

- It is now common practice to make available most of the information processed by a protection control unit, both locally for network operation and maintenance, and remotely for higher functions of control, monitoring, energy efficiency and asset management.
- To comply with this requirement, MicroLogic Active control units **incorporate several channels of communication, including Ethernet, Modbus SL and wireless communication interfaces.**

MicroLogic Name Codes

2.0 EP

Protection type

- 2.0 Basic Protection (LI - Long Time and Instantaneous Protection)
- 5.0 Selective Protection (LSI)
- 6.0 Selective Protection (LSI) + Ground Fault Protection

Communication


P for "PowerTag function", control unit with wireless communication

Measurement type

- A for "ammeter"
- E for "power and energy meter"

TransferPacT UC (Universal Controller) NEW

ATS Kit

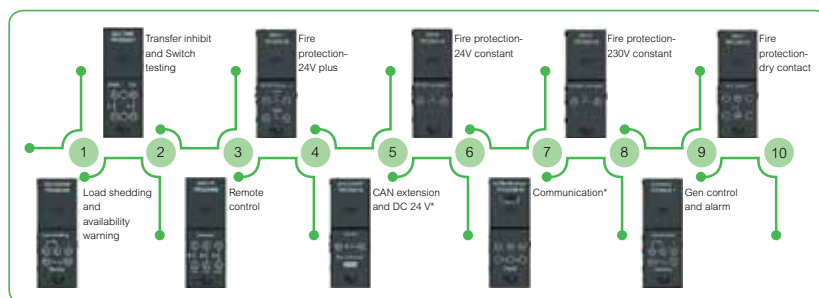

Description	Reference	Unit MRP [₹]
UC NSX,NS,MTZ 230V AC 50/60 Hz; 208V (L-L) motor mechanism on breakers	TUC2BMS051D02E	On Request
UC NSX,NS,MTZ 440V AC 50/60 Hz; 380V (L-L) motor mechanism on breakers	TUC2BMS052D02E	On Request
UC NSX,NS,MTZ 220V AC 50/60 Hz; 220V (L-N) motor mechanism on breakers	TUC2BMS053D02E	On Request
Voltage sampling cable for NSX 250	TPCOTH87	On Request
Voltage sampling cable for NSX 630,NS1600,MTZ1,2,3	TPCOTH88	On Request

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

EasyPact NW.

Digitally intelligent. Efficiently robust.

By 2050, the United Nations predicts urbanization rates to **reach 68%**, up from **55% in 2018**. This rapid urban growth is putting huge pressure on infrastructure, resulting in more complex power systems. Managing them is a global challenge **with 68%** of facility managers struggling with network reliability.¹

Built on a legacy of innovation.

Our new, reliable, simple air circuit breaker, **EasyPact NW** delivers up to 66 kA breaking capacity. Featuring a color-coded health status bar and native connectivity, it provides instant system diagnostics and detailed event logs, making power distribution simpler and more reliable.

Redefine power distribution



Breaker health at a glance



Asset status at your fingertips



Enhanced performance



A compact design



¹Reported by the International Facility Management Association (IFMA).

Our **EasyPact** NW range ensures reliable protection with ratings from 630 to 4000 A.

	630 A	800 A	1000 A	1250 A	1600 A	2000 A	3200 A	4000 A
Size 1 Type C	Icu=66KA, Ics=55KA, Icw 1s=50KA at 440V							
Size 2 Type N	Icu=Ics=Icw=50KA at 440V							
Size 2 Type H	Icu=Ics=Icw=66KA @440V							

TSS trip system LI, LSI & LSIG



- Complete function of TS trip system
- Visible Interactive health indication
- NFC wireless to EPD App (Current measurement).
- Battery in front of breaker, Easy replace.
- Last trip context, last 5 alarm by EPD
- 30 trip record, 70 event record by EPC

TSE trip system LI, LSI & LSIG




- Completed function of TSA trip system
- Voltage, power factor, power & energy measurement
- Calculates the current demand value
- 10 trip record with time stamp
- Communication module as option
- Programmable contacts as option

TSA trip system LI, LSI & LSIG



- Basic Protection setting
- Trip cause LED indication
- LCD screen
- Current measurement
- Phase Bar graph
- QR Code

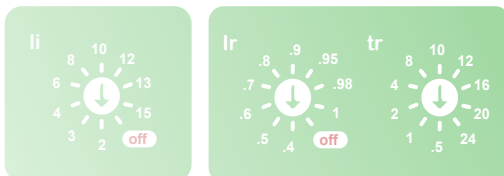



- BIS Certified 
- Conforms to IS/ IEC 60947-2 & 3
- Microprocessor based TSS trip systems with switchable thermal memory
- No derating up to 50°C
- Zone Selective Interlocking
- Fully rated neutral with inbuilt protection
- NFC wireless to EPD App
- Visible Interactive health indication.
- Pre trip alarm & individual fault indicating LEDs
- Icu=Ics=Icw(1sec) =50kA @ 440V AC

Draw-out Type circuit breaker with Microprocessor based TS6S Trip Unit (without display)

Rating In (A)	3P Draw-out Manual Reference	Unit MRP [₹]	3P Draw-out Electrical Reference	Unit MRP [₹]	4P Draw-out Manual Reference	Unit MRP [₹]	4P Draw-out Electrical Reference	Unit MRP [₹]
800	ENW208N3MW6S	325280	ENW208N3NW6S	421280	ENW208N4MW6S	408280	ENW208N4NW6S	504270
1000	ENW210N3MW6S	341720	ENW210N3NW6S	437720	ENW210N4MW6S	427750	ENW210N4NW6S	523740
1250	ENW212N3MW6S	380480	ENW212N3NW6S	476480	ENW212N4MW6S	473780	ENW212N4NW6S	569770
1600	ENW216N3MW6S	432440	ENW216N3NW6S	528430	ENW216N4MW6S	527660	ENW216N4NW6S	623660
2000	ENW220N3MW6S	603180	ENW220N3NW6S	699180	ENW220N4MW6S	740770	ENW220N4NW6S	836760
2500	ENW225N3MW6S	745690	ENW225N3NW6S	841680	ENW225N4MW6S	906170	ENW225N4NW6S	1002160
3200	ENW232N3MW6S	901570	ENW232N3NW6S	997560	ENW232N4MW6S	1105470	ENW232N4NW6S	1201460
4000	ENW240N3MW6S	1102680	ENW240N3NW6S	1198670	ENW240N4MW6S	1416530	ENW240N4NW6S	1512530

EasyPact NW Draw out ACB

ACB variants	LP Changes w.r.t TS6S		How to arrive at new reference number
Switch Disconnector (Without Trip Unit)	Reduce	₹21020	Example : ACB reference with TS6S trip unit - ENW208N3MW6S. For switch disconnector reference replace 6S by 0D i.e ENW208N3MW0D
ACB With TS6A Trip Unit (LCD Display with Current Metering)	Add	₹10740	Example : ACB reference with TS6S trip unit- ENW208N3MW6S. For ACB reference with TS6A trip unit replace 6S by 6A i.e ENW208N3MW6A
ACB With TS6E Trip Unit (LCD Display with current metering Voltage Metering and Last 10 Trip History)	Add	₹24750	Example : ACB reference with TS6S trip unit - ENW208N3MW6S. For ACB reference with TS6E trip unit replace 6S by 6E i.e ENW208N3MW6E

Note:

The product label on all electrical operated breakers may have different reference number than above printed however both references will have same functionalities. For example

- ENW208N3NW6S can be represented as ENW208N3EW6S
- ENW208N3NF6S can be represented as ENW208N3EF6S

All draw-out type circuit breakers will be supplied with:

- Top and Bottom horizontal terminations.
 - 1 no Electrical fault indication Contact (SDE).
 - No Auxiliary contact block (OF) with 4 C/O contacts.
 - Safety shutters on Chassis & door sealing frame-Escutcheon (COP).
- All electrically operated breakers are supplied with motor mechanism (MCH), closing coil (XF) & shunt release (MX).
 - External Neutral CT required for highly un-balanced TP-N system must be ordered at extra price.
 - Any other accessories are optional at extra price.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

 NORMAL STOCK ITEMS

W.E.F. January 15th, 2026



- BIS Certified 
- Conforms to IS/ IEC 60947-2 & 3
- Microprocessor based TSS trip systems with switchable thermal memory
- No derating up to 50°C
- Zone Selective Interlocking
- Fully rated neutral with inbuilt protection
- NFC wireless to EPD App
- Visible Interactive health indication.
- Pre trip alarm & individual fault indicating LEDs
- $I_{cu}=I_{cs}=I_{cw}(1\text{sec})=50\text{kA @ }440\text{V AC}$

Draw-out Type circuit breaker with Microprocessor based TS2S Trip Unit (without display)

Rating In (A)	3P Draw-out Manual Reference	Unit MRP [₹]	3P Draw-out Electrical Reference	Unit MRP [₹]	4P Draw-out Manual Reference	Unit MRP [₹]	4P Draw-out Electrical Reference	Unit MRP [₹]
800	ENW208N3MW2S	317260	ENW208N3NW2S	413250	ENW208N4MW2S	400260	ENW208N4NW2S	496250
1000	ENW210N3MW2S	333700	ENW210N3NW2S	429690	ENW210N4MW2S	419730	ENW210N4NW2S	515720
1250	ENW212N3MW2S	372460	ENW212N3NW2S	468450	ENW212N4MW2S	465750	ENW212N4NW2S	561750
1600	ENW216N3MW2S	424420	ENW216N3NW2S	520410	ENW216N4MW2S	519640	ENW216N4NW2S	615640
2000	ENW220N3MW2S	595160	ENW220N3NW2S	691150	ENW220N4MW2S	732750	ENW220N4NW2S	828740
2500	ENW225N3MW2S	737660	ENW225N3NW2S	833660	ENW225N4MW2S	898150	ENW225N4NW2S	994140
3200	ENW232N3MW2S	893550	ENW232N3NW2S	989540	ENW232N4MW2S	1097440	ENW232N4NW2S	1193440
4000	ENW240N3MW2S	1094650	ENW240N3NW2S	1190650	ENW240N4MW2S	1408510	ENW240N4NW2S	1504500

EasyPact NW Draw out ACB

ACB variants	LP Changes w.r.t TS2S		How to arrive at new reference number
ACB With TS2A Trip Unit (LCD Display with Current Metering)	Add	₹4970	Example : ACB reference with TS2S trip unit - ENW208N3MW2S. For ACB reference With TS2A replace 2S by 2A i.e ENW208N3MW2A
ACB With TS2E Trip Unit (LCD Display with current metering Voltage Metering and Last 10 Trip History)	Add	₹15490	Example : ACB reference with TS2S trip unit- ENW208N3MW6S. For ACB reference with TS2E trip unit replace 2S by 2E i.e ENW208N3MW2E

Note:

The product label on all electrical operated breakers may have different reference number than above printed however both references will have same functionalities. For example

- ENW208N3NW6S can be represented as ENW208N3EW6S
- ENW208N3NF6S can be represented as ENW208N3EF6S

All draw-out type circuit breakers will be supplied with:

- Top and Bottom horizontal terminations.
 - 1 no Electrical fault indication Contact (SDE).
 - No Auxiliary contact block (OF) with 4 C/O contacts.
 - Safety shutters on Chassis & door sealing frame-Escutcheon (COP).
- All electrically operated breakers are supplied with motor mechanism (MCH), closing coil (XF) & shunt release (MX).
 - External Neutral CT required for highly un-balanced TP-N system must be ordered at extra price.
 - Any other accessories are optional at extra price.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

 NORMAL STOCK ITEMS

W.E.F. January 15th, 2026



- BIS Certified 
- Conforms to IS/ IEC 60947-2 & 3
- Microprocessor based TSS trip systems with switchable thermal memory
- No derating up to 50°C
- Zone Selective Interlocking
- Fully rated neutral with inbuilt protection
- NFC wireless to EPD App
- Visible Interactive health indication.
- Pre trip alarm & individual fault indicating LEDs
- $I_{cu}=I_{cs}=I_{cw}(1sec) = 50kA @ 440V AC$

Fixed Type circuit breaker with Microprocessor based TS6S Trip Unit (without display)

Rating in (A)	3P Fix Manual Reference	Unit MRP [₹]	3P Fix Electrical Reference	Unit MRP [₹]	4P Fix Manual Reference	Unit MRP [₹]	4P Fix Electrical Reference	Unit MRP [₹]
800	ENW208N3MF6S	242550	ENW208N3NF6S	338550	ENW208N4MF6S	308400	ENW208N4NF6S	404390
1000	ENW210N3MF6S	265520	ENW210N3NF6S	361510	ENW210N4MF6S	334930	ENW210N4NF6S	430930
1250	ENW212N3MF6S	305180	ENW212N3NF6S	401170	ENW212N4MF6S	381280	ENW212N4NF6S	477280
1600	ENW216N3MF6S	338750	ENW216N3NF6S	434740	ENW216N4MF6S	437890	ENW216N4NF6S	533880
2000	ENW220N3MF6S	454170	ENW220N3NF6S	550160	ENW220N4MF6S	593530	ENW220N4NF6S	689530
2500	ENW225N3MF6S	553680	ENW225N3NF6S	649670	ENW225N4MF6S	699520	ENW225N4NF6S	795510
3200	ENW232N3MF6S	792560	ENW232N3NF6S	888550	ENW232N4MF6S	977890	ENW232N4NF6S	1073880
4000	ENW240N3MF6S	976010	ENW240N3NF6S	1072010	ENW240N4MF6S	1223620	ENW240N4NF6S	1319610

EasyPact NW Fix ACB

ACB variants	LP Changes w.r.t TS6S		How to arrive at new reference number
Switch Disconnector (Without Trip Unit)	Reduce	₹21020	Example : ACB reference with TS6S trip unit - ENW208N3MF6S. For switch disconnector reference replace 6S by 0D i.e ENW208N3MF0D
ACB With TS6A Trip Unit (LCD Display with Current Metering)	Add	₹10740	Example : ACB reference with TS6S trip unit- ENW208N3MF6S. For ACB reference with TS6A trip unit replace 6S by 6A i.e ENW208N3MF6A
ACB With TS6E Trip Unit (LCD Display with current metering Voltage Metering and Last 10 Trip History)	Add	₹24750	Example : ACB reference with TS6S trip unit - ENW208N3MF6S. For ACB reference with TS6E trip unit replace 6S by 6E i.e ENW208N3MF6E

Note:

The product label on all electrical operated breakers may have different reference number than above printed however both references will have same functionalities. For example

- ENW208N3NW6S can be represented as ENW208N3EW6S
- ENW208N3NF6S can be represented as ENW208N3EF6S

All draw-out type circuit breakers will be supplied with:

- Top and Bottom horizontal terminations.
 - 1 no Electrical fault indication Contact (SDE).
 - No Auxiliary contact block (OF) with 4 C/O contacts.
 - Safety shutters on Chassis & door sealing frame-Escutcheon (COP).
- All electrically operated breakers are supplied with motor mechanism (MCH), closing coil (XF) & shunt release (MX).
 - External Neutral CT required for highly un-balanced TP-N system must be ordered at extra price.
 - Any other accessories are optional at extra price.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

 NORMAL STOCK ITEMS

W.E.F. January 15th, 2026



- BIS Certified 
- Conforms to IS/ IEC 60947-2 & 3
- Microprocessor based TSS trip systems with switchable thermal memory
- No derating up to 50°C
- Zone Selective Interlocking
- Fully rated neutral with inbuilt protection
- NFC wireless to EPD App
- Visible Interactive health indication.
- Pre trip alarm & individual fault indicating LEDs
- $I_{cu}=I_{cs}=I_{cw}(1sec) = 50kA @ 440V AC$

Fixed Type circuit breaker with Microprocessor based TS2S Trip Unit (without display)

Rating in (A)	3P Fix Manual Reference	Unit MRP [₹]	3P Fix Electrical Reference	Unit MRP [₹]	4P Fix Manual Reference	Unit MRP [₹]	4P Fix Electrical Reference	Unit MRP [₹]
800	ENW208N3MF2S	234530	ENW208N3NF2S	330520	ENW208N4MF2S	300380	ENW208N4NF2S	396370
1000	ENW210N3MF2S	257490	ENW210N3NF2S	353490	ENW210N4MF2S	326910	ENW210N4NF2S	422900
1250	ENW212N3MF2S	297160	ENW212N3NF2S	393150	ENW212N4MF2S	373260	ENW212N4NF2S	469260
1600	ENW216N3MF2S	330730	ENW216N3NF2S	426720	ENW216N4MF2S	429860	ENW216N4NF2S	525860
2000	ENW220N3MF2S	446150	ENW220N3NF2S	542140	ENW220N4MF2S	585510	ENW220N4NF2S	681500
2500	ENW225N3MF2S	545650	ENW225N3NF2S	641650	ENW225N4MF2S	691490	ENW225N4NF2S	787490
3200	ENW232N3MF2S	784540	ENW232N3NF2S	880530	ENW232N4MF2S	969870	ENW232N4NF2S	1065860
4000	ENW240N3MF2S	967990	ENW240N3NF2S	1063990	ENW240N4MF2S	1215600	ENW240N4NF2S	1311590

EasyPact NW Fix ACB

ACB Variant	LP Changes w.r.t TS2S		How to arrive at New Reference Number
ACB With TS2A Trip Unit (LCD Display with Current Metering)	Add	₹4970	Example : ACB reference with TS2S trip unit - ENW208N3MF2S. For ACB reference with TS2A trip unit replace 2S by 2A i.e ENW208N3MF2 A
ACB With TS2E Trip Unit (LCD Display with current metering Voltage Metering and Last 10 Trip History)	Add	₹15490	Example : ACB reference with TS2S trip unit - ENW208N3MF2S. For ACB reference with TS2E trip unit replace 2S by 2E i.e ENW208N3MF2 E

Note:

The product label on all electrical operated breakers may have different reference number than above printed however both references will have same functionalities. For example

- ENW208N3NW6S can be represented as ENW208N3EW6S
- ENW208N3NF6S can be represented as ENW208N3EF6S

All draw-out type circuit breakers will be supplied with:

- Top and Bottom horizontal terminations.
 - 1 no Electrical fault indication Contact (SDE).
 - No Auxiliary contact block (OF) with 4 C/O contacts.
 - Safety shutters on Chassis & door sealing frame-Escutcheon (COP).
- All electrically operated breakers are supplied with motor mechanism (MCH), closing coil (XF) & shunt release (MX).
 - External Neutral CT required for highly un-balanced TP-N system must be ordered at extra price.
 - Any other accessories are optional at extra price.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

 NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Component	Specification	Reference	Unit MRP ₹	
Gear Motor (MCH)				
AC 50/60 Hz	100/130 V	47893	73760	
	200/240 V	47894 ☒	73760	
	380/415 V	47896	73760	
DC	24/30 V	47888	73760	
	48/60 V	47889	73760	
	100/125 V	47890	73760	
	200/250 V	47891	73760	
Closing Release (XF)				
AC 50/60 Hz DC	24/30 V DC	33659	11120	
	48/60 V DC	33660	11120	
	100/130 V AC/DC	MVS15511 ☒	11120	
	200/250 V AC/DC	MVS15512 ☒	11120	
	380/480 V AC	MVS15513	11120	
Opening Release (MX)				
AC 50/60 Hz DC	24/30 V DC, 24 V AC	33659	11120	
	48/60 V DC, 48 V AC	33660	11120	
	100/130 V AC/DC	33661 ☒	11120	
	200/250 V AC/DC	33662 ☒	11120	
	380/480 V AC	33664 ☒	11120	
Terminal Block				
For drawout circuit breaker		47849	400	
Under Voltage Release (MN)				
AC 50/60 Hz DC	24/30 V DC, 24 V AC	33668	11120	
	48/60 V DC, 48 V AC	33669	11120	
	100/130 V AC/DC	33670 ☒	11120	
	200/250 V AC/DC	33671 ☒	11120	
	380/480 V AC	33673 ☒	11120	
MN Delay Unit				
AC 50/60 Hz DC	48/60 V AC/DC	Rr (adjustable)	33680	15010
	100/130 V AC/DC	Rr (adjustable)	33681	15010
	200/250 V AC/DC	Rr (adjustable)	33682	15010
	380/480 V AC/DC	Rr (adjustable)	33683	15010
	100/130 V AC/DC	R (non-adjustable)	33684	13980
	200/250 V AC/DC	R (non-adjustable)	33685 ☒	13980
ON/OFF Indication Contacts (Additional OF contact)				
1 additional block of 4 contacts		47887	10040	
Door Interlock (VPECD)/1 part				
On right hand side of chassis		47914 ☒	4950	
Operation Counter				
Operation Counter CDM		48535	14070	

* The accessory range is standardized across Easypact NW and Easypact MVS models.



- BIS Certified 
- Conforms to IS/ IEC 60947-2 & 3
- Microprocessor based TSS trip systems with switchable thermal memory
- No derating up to 50°C
- Zone Selective Interlocking
- Fully rated neutral with inbuilt protection
- NFC wireless to EPD App
- Visible Interactive health indication.
- Pre trip alarm & individual fault indicating LEDs
- $I_{cw}(1sec) = 50kA @ 440V AC$

Draw-out Type circuit breaker with Microprocessor based TS6S Trip Unit (without display)

Rating in (A)	3P Draw-out Manual Reference	Unit MRP [₹]	3P Draw-out Electrical Reference	Unit MRP [₹]	4P Draw-out Manual Reference	Unit MRP [₹]	4P Draw-out Electrical Reference	Unit MRP [₹]
630	ENW106C3MW6S	On Request	ENW106C3NW6S	On Request	ENW106C3MW6S	On Request	ENW106C3NW6S	On Request
800	ENW108C3MW6S	On Request	ENW108C3NW6S	On Request	ENW108C4MW6S	On Request	ENW108C4NW6S	On Request
1000	ENW110C3MW6S	On Request	ENW110C3NW6S	On Request	ENW110C4MW6S	On Request	ENW110C4NW6S	On Request
1250	ENW112C3MW6S	On Request	ENW112C3NW6S	On Request	ENW112C4MW6S	On Request	ENW112C4NW6S	On Request
1600	ENW116C3MW6S	On Request	ENW116C3NW6S	On Request	ENW116C4MW6S	On Request	ENW116C4NW6S	On Request

Draw-out Type circuit breaker with Microprocessor based TS2S Trip Unit (without display)

Rating in (A)	3P Draw-out Manual Reference	Unit MRP [₹]	3P Draw-out Electrical Reference	Unit MRP [₹]	4P Draw-out Manual Reference	Unit MRP [₹]	4P Draw-out Electrical Reference	Unit MRP [₹]
630	ENW106C3MW2S	On Request	ENW106C3NW2S	On Request	ENW106C3MW2S	On Request	ENW106C3NW2S	On Request
800	ENW108C3MW2S	On Request	ENW108C3NW2S	On Request	ENW108C4MW2S	On Request	ENW108C4NW2S	On Request
1000	ENW110C3MW2S	On Request	ENW110C3NW2S	On Request	ENW110C4MW2S	On Request	ENW110C4NW2S	On Request
1250	ENW112C3MW2S	On Request	ENW112C3NW2S	On Request	ENW112C4MW2S	On Request	ENW112C4NW2S	On Request
1600	ENW116C3MW2S	On Request	ENW116C3NW2S	On Request	ENW116C4MW2S	On Request	ENW116C4NW2S	On Request

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

 NORMAL STOCK ITEMS

W.E.F. January 15th, 2026



- BIS Certified 
- Conforms to IS/ IEC 60947-2 & 3
- Microprocessor based TSS trip systems with switchable thermal memory
- No derating up to 50°C
- Zone Selective Interlocking
- Fully rated neutral with inbuilt protection
- NFC wireless to EPD App
- Visible Interactive health indication.
- Pre trip alarm & individual fault indicating LEDs
- $I_{cw}(1sec) = 50kA @ 440V AC$

Fixed Type circuit breaker with Microprocessor based TS6S Trip Unit (without display)

Rating in (A)	3P Fix Manual Reference	Unit MRP [₹]	3P Fix Electrical Reference	Unit MRP [₹]	4P Fix Manual Reference	Unit MRP [₹]	4P Fix Electrical Reference	Unit MRP [₹]
630	ENW106C3MF6S	On Request	ENW106C3NF6S	On Request	ENW106C4MF6S	On Request	ENW106C4NF6S	On Request
800	ENW108C3MF6S	On Request	ENW108C3NF6S	On Request	ENW108C4MF6S	On Request	ENW108C4NF6S	On Request
1000	ENW110C3MF6S	On Request	ENW110C3NF6S	On Request	ENW110C4MF6S	On Request	ENW110C4NF6S	On Request
1250	ENW112C3MF6S	On Request	ENW112C3NF6S	On Request	ENW112C4MF6S	On Request	ENW112C4NF6S	On Request
1600	ENW116C3MF6S	On Request	ENW116C3NF6S	On Request	ENW116C4MF6S	On Request	ENW116C4NF6S	On Request

Fixed Type circuit breaker with Microprocessor based TS2S Trip Unit (without display)

Rating in (A)	3P Fix Manual Reference	Unit MRP [₹]	3P Fix Electrical Reference	Unit MRP [₹]	4P Fix Manual Reference	Unit MRP [₹]	4P Fix Electrical Reference	Unit MRP [₹]
630	ENW106C3MF2S	On Request	ENW106C3NF2S	On Request	ENW106C4MF2S	On Request	ENW106C4NF2S	On Request
800	ENW108C3MF2S	On Request	ENW108C3NF2S	On Request	ENW108C4MF2S	On Request	ENW108C4NF2S	On Request
1000	ENW110C3MF2S	On Request	ENW110C3NF2S	On Request	ENW110C4MF2S	On Request	ENW110C4NF2S	On Request
1250	ENW112C3MF2S	On Request	ENW112C3NF2S	On Request	ENW112C4MF2S	On Request	ENW112C4NF2S	On Request
1600	ENW116C3MF2S	On Request	ENW116C3NF2S	On Request	ENW116C4MF2S	On Request	ENW116C4NF2S	On Request

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

 NORMAL STOCK ITEMS

W.E.F. January 15th, 2026



EasyPacT MVS DA1

1500V DC Switch-Disconnectors

Switch-Disconnectors

- Ratings
 - EasyPact MVS 1600-4000A DA1
 - Switch-Disconnectors type : DA1
- 3 or 4 poles
- Fixed version
- Only one frame size



se.com/in

Schneider
Electric



Easy Series

EasyPacT™ MVS T3

at 1140V AC

LV air circuit breakers
from 800 to 4000A
fixed and drawout version



se.com/in

Schneider
Electric



ASCO - Automatic Transfer Switches

Power available always when you need it

ASCO Power Technologies is your one stop solution for Transfer Switch solutions to improve power availability by transferring electrical loads to alternate sources of power. Whether you require uninterrupted power supply for critical operations or simply keep the lights on, we have you covered.

se.com/in

Schneider
Electric

ASCO 7000 SERIES IEC Medium Voltage Power Transfer Switch

ASCO Transfer Switches improve power availability by enabling automatic transfer between sources. The ASCO 7000 SERIES Medium Voltage Automatic Transfer Switch offers various configurations and switching modes (delayed and closed transition) to meet unique application needs and conforms to the IEC 62271-200 standard. Its standard configuration includes PIX RoF Cubicle sections, Normal Source Circuit Breaker section, Emergency Source Circuit Breaker section, and Load feeder section, all operated by ASCO's intelligent Group 5 controller for reliable transfer between sources.



Ordering Information of ASCO 7000 SERIES Medium Voltage Automatic Transfer Switch

E + 7 + A + C + T + P + 0 + 3 + 1250 + 9 + 5 + X + L													
Interrupting Rating	Product SERIES	Operation Type	Transition Type	Construction	Device Type	Neutral Code	Poles	Amperes	Voltage	Controller	Accessories	Enclosures	
A 25kAIC	7 7000 SERIES	A Automatic	C Closed	T Transfer Switch	P PIX RoF IEC Dual CB Transfer Switch	0 None	3	0630 0800 1250 2000 2500	3 3300V 6 6600V 7 7200V V 11000V 9 13800V 0 Other	5 Group 5	0 None X Per Acc#	L IP4X	
E 31.5kAIC			D Delayed										

Contact your local representative for availability of other Voltages

Medium Voltage Transfer Switch Specifications		Additional Features
Voltage Class	12kV or 17.5kV	- ASCO 7000 Series Group 5 Controller - Transition Type: Delayed or Closed - Automatic with Manual Operation mode to facilitate testing. - Contacts for source acceptability. (18B & 18G) - LED Indication of source status - Output contact for disconnecting load before and/ or after transfer (31Z) - Thermostat controlled heater in each breaker and cable section for condensation control - Air Insulated PIX RoF Switchgear Cubicles with EasyPact EXE breakers - Integrated earthing solution for cables and busbars through interlocked earthing switch - Segregated controls - Convenience light and outlet in low voltage compartments.
Nominal System Voltage	3.3kV, 6.6kV, 7.2kV, 11kV, 13.8kV	
Ampacity Rating	630A, 800A, 1250A, 2000A, 2500A	
Number of Sections	3	
IEC 62271-200	Yes	
Internal Arc Classification (IAC)	Default: AFLR Up to 31.5kA for 0.1 second; Optional: AFLR Up to 31.5kA for 1 second (Accessory 138AC)	
Cable Entry	Bottom Default; Top Optional (Accessory 138*)	
Draw Out Circuit Breakers	Yes	
Automatic Shutters	Yes	
Coating - Powder Coated Polyester	Color RAL 9003	
Enclosure Rating	IP4X (Indoor)	
Protective Relays	Optional (Accessories 118PE and 118PN)	
Ethernet/Serial Communications	Optional (Accessory 72EE2)	
Power Metering	Optional (Accessory 135L)	
Top Cable Entry	Optional (Accessories 138CL, 138CN, 138CE)	
Surge Protection	Optional (Accessories 73MV1 and 73MV2)	
Operating Conditions	Ambient Temp -5C to +40C; Relative Humidity over a 24 hour period <95%, over a 1 month period <90%; Installation altitude above sea level < 1000m*	

*Note: Contact Sales representative for derating options outside of published operating conditions.



ASCO Power Technologies™

The **7000 SERIES** Automatic Transfer Bypass-Isolation Switch is designed for critical applications where uninterrupted power is essential.

- Allows bypass-isolation without load interruption
- Primary transfer switch can be inspected, tested, and maintained without interrupting power to the load
- Transfer switch and bypass transfer switch have identical electrical ratings
- Range: 150 to 4000A
- Draw-out design allows for easy transfer switch maintenance
- Open Transition (OTTS), Closed Transition (CTTS) and Delayed Transition (DTTS) Designs

Series 7000/300, Automatic Transfer Switch (ASCO)

7000/300 Series Power Transfer Switches are available in open and enclosed variants, ranging from 30 to 4000 amps (LV) & 1200 to 3000A (MV) with wide range of accessories. All switching configurations (OTTS, DTTS, CTTS) are available with optional integrated bypass-isolation switch.



Series 7000/300, Automatic Transfer Switch (ASCO)

Frame	Rating(A)	Controller Type	Reference (4P, Overlapping Neutral)	Unit MRP [₹]	Controller Type	Reference (4P, Overlapping Neutral)	Unit MRP [₹]
D	30	Series 7000 Group 5 Controller	D07ATSC30030K500	On Request	Series 300 Group G Controller	D03ATSC30030KG00	On Request
	70		D07ATSC30070K500	On Request		D03ATSC30070KG00	On Request
	104		D07ATSC30100K500	On Request		D03ATSC30104KG00	On Request
	150		D07ATSC30150K500	On Request		D03ATSC30150KG00	On Request
	200		D07ATSC30200K500	On Request		D03ATSC30200KG00	On Request
	230		D07ATSC30230K500	On Request		D03ATSC30230KG00	On Request
J	260	Series 7000 Group 5 Controller	J07ATSC30260K500	On Request		J03ATSC30260KG00	On Request
	400		J07ATSC30400K500	On Request		J03ATSC30400KG00	On Request
	600		J07ATSC30600K500	On Request		J03ATSC30600KG00	On Request
H	800	Series 7000 Group 5 Controller	H07ATSC30800K500	On Request		H03ATSC30800KG00	On Request
	1000		H07ATSC31000K500	On Request		H03ATSC31000KG00	On Request
	1200		H07ATSC31200K500	On Request		H03ATSC31200KG00	On Request
G	1600	Series 7000 Group 5 Controller	G07ATSC31600K500	On Request		G03ATSC31600KG00	On Request
	2000		G07ATSC32000K500	On Request		G03ATSC32000KG00	On Request
	2600		G07ATSC32600K500	On Request		G03ATSC32600KG00	On Request
	3000		G07ATSC33000K500	On Request		G03ATSC33000KG00	On Request
	3200		G07ATSC33200K500	On Request		G03ATSC33200KG00	On Request
	4000		G7ATSC34000K5X40RM	On Request		-	-

- Conforming to UL 1008
- Fast & Consistent Transfer (Less than 100ms)
- Single Solenoid True Double throw Design
- High Withstanding & Closing-On Fault Currents (WCR)
- Neutral Overlap to eliminate Voltage Transients
- In-Phase Monitor to avoid Motor Inrush current

- Engine Start/Stop, AMF Logic & Time Delay Setting
- Programmable Daily/Weekly Engine Exerciser
- 4 Line LCD + LED Display
- 99 Events Log & Diagnostics with Date/Time
- Statistical ATS System Monitoring Information
- Communication Compatible (Modbus/Ethernet)

- 2P, 3P & 4P with solid neutral/Switched Neutral are available
- ATS with stand alone Type Tested NEMA Enclosure available
- For Series 7000 Close Transition, Bypass Option & Medium Voltage ATS offer please contact Customer Care Centre

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

✓ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

WOTPC, Automatic transfer switch

- Conforming to IEC 60947-6-1
- Solenoid operated, Built-in Microprocessor Controller
- 1000-4000 Amps in same compact frame
- Utilization Category: AC 33A
- Mechanical Endurance: 20,000 ops
- Rated Short circuit withstand of 65 kA, 3sec & 90 kA, 1sec
- Built in RS 485 port for communication



Rating (amps)	Poles	Reference	Unit MRP [₹]	Poles	Reference	Unit MRP [₹]
1000	3P	OT10003D5VI	On Request	4P	OT10004D5VI	On Request
1250	3P	OT12503D5VI	On Request	4P	OT12504D5VI	On Request
1600	3P	OT16003D5VI	On Request	4P	OT16004D5VI✓	On Request
2000	3P	OT20003D5VI	On Request	4P	OT20004D5VI✓	On Request
2500	3P	OT25003D5VI	On Request	4P	OT25004D5VI✓	On Request
3200	3P	OT32003D5I	On Request	4P	OT32004D5I✓	On Request
4000	3P	OT40003D5I	On Request	4P	OT40004D5I✓	On Request

*above references are with vertical termination, for horizontal terminal please contact customer care

WOTPC Accessories



The transfer switch connects to the controller through extension harness. The controller automatically transfers between the utility and backup source.

Description	Reference	Unit MRP [₹]
Phase Partition (Each)	W0OT0001I	On Request
Extension Harness (4m)	W0OT0002I	On Request
Copper bar for Vertical Wiring	W0OT0003I	On Request

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

✓ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Advanced transfer switch to maximize

UPTIME

NEW



"TransferPacT Active Automatic is now ready to deliver maximum uptime and safety with a complete range from 32A to 1600A

- Conforming to IEC 60947-6-1
- Optimize panel space by up to 30%, saving cost and improving efficiency
- Ultra fast transfer speed for better power availability
- Solenoid operated, Built - in Microprocessor Controller
- Robust design
- Utilization Category: AC 33A/B
- Poles: 3,4
- Scalable with plug and play - 10 function modules
- Connectivity with compliance to cyber security standard IEC 62443 - SL1

TransferPacT™ Active Automatic



Environmental data program

se.com/in

Schneider
Electric

TransferPacT Active Automatic



TransferPacT is an Ecostruxure-ready advance transfer switch to maximize reliability and uptime for your facility.

- Conforming to IEC 60947-6-1
- Solenoid operated, Built-in Microprocessor Controller
- Fast transfer time of <500ms
- 2,3 and 4 Pole configuration ranging within 32-800A
- Three position, Open transition transfer switch
- Extreme Environment proof with operating temperature of -25 to 70°C
- Utilization Category: AC 33A/B
- Tested for Total Discrimination with ComPacT NSXm Circuit breakers for seamless integration.
- Scalable with plug and play - 10 function modules
- Connectivity with compliance to cyber security standard IEC 62443, SL1 Level

Frame			TA10				TA16		
Rating (amps)	Poles*	Reference	Unit MRP [₹]	Poles*	Reference	Unit MRP [₹]	Poles*	Reference	Unit MRP [₹]
32	2P	TA10D2L0323TPE	On Request	4P	TA10D4L0324TPE	On Request	-	-	-
40	2P	TA10D2L0403TPE	On Request	4P	TA10D4L0404TPE	On Request	-	-	-
50	2P	TA10D2L0503TPE	On Request	4P	TA10D4L0504TPE	On Request	-	-	-
63	2P	TA10D2L0633TPE	On Request	4P	TA10D4L0634TPE	On Request	-	-	-
80	2P	TA10D2L0803TPE	On Request	4P	TA10D4L0804TPE	On Request	4P	TA16D4L0804TPE	On Request
100	2P	TA10D2L1003TPE	On Request	4P	TA10D4L1004TPE	On Request	4P	TA16D4L1004TPE	On Request
125		-	-	-	-	-	4P	TA16D4L1254TPE	On Request
160		-	-	-	-	-	4P	TA16D4L1604TPE	On Request

*For 3P ATS, please contact Customer Care Centre.

Frame		TA25			TA63		
Rating (amps)	Poles*	Reference	Unit MRP [₹]	Poles*	Reference	Unit MRP [₹]	
200	4P	TA25D4L2004TPE	On Request	-	-	-	
250	4P	TA25D4L2504TPE	On Request	-	-	-	
320	-	-	-	4P	TA63D4L3204TPE	On Request	
400	-	-	-	4P	TA63D4L4004TPE	On Request	
500	-	-	-	4P	TA63D4L5004TPE	On Request	
630	-	-	-	4P	TA63D4L6304TPE	On Request	

*For 3P ATS, please contact Customer Care Centre.

Frame		TA80			TA1A		
Rating (amps)	Poles*	Reference	Unit MRP [₹]	Poles*	Reference	Unit MRP [₹]	
800	4P	TA80D4L8004TPE	On Request	4P	TA1AD4L8004TPE	On Request	
1000	-	-	-	4P	TA1AD4L10H4TPE	On Request	
1200	-	-	-	4P	TA1AD4L12H4TPE	On Request	
1600	-	-	-	4P	TA1AD4L16H4TPE	On Request	

*For 3P ATS, please contact Customer Care Centre.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☑ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

TransferPacT Active Automatic

TransferPacT Active Automatic Accessories



HMI cable



External HMI



Function Module

TransferPacT Active Automatic is designed to provide maximum scalability with plug and play function modules (no increase in the footprint) and intuitive external HMI.

Accessory Type	Description	Reference	Unit MRP [₹]
Communication function modules	Modbus RTU (Serial Port)	TPCCOM16	On Request
	BUS extension and 24 Vdc auxiliary supply	TPCDIO15	On Request
Fire Protection function modules	Fire protection,24VDC pulse	TPCDIO10	On Request
	Fire protection,24VDC constant	TPCDIO11	On Request
	Fire protection,230VAC constant	TPCDIO13	On Request
	Fire protection,dry contact	TPCDIO14	On Request
Control and Signalling function modules	Genset start and Alarm	TPCDIO17	On Request
	Load shedding and Availability warning	TPCDIO05	On Request
	Transfer inhibit and Remote testing	TPCDIO07	On Request
	Voluntary Remote Control	TPCDIO08	On Request
Display Modules	External HMI	TPCCIF04	On Request
	LCD display	TPCCIF01	On Request
	Rotary display	TPCCIF02	On Request
	IP54 cover	TPCOTH38	On Request

*For more details on accessories, please contact Customer Care Centre.

Circuit Breaker/Transfer Switching Equipment Coordination

Upstream: ComPacT NSXm

Downstream: TransferPacT TA10, TA16

Ue: ≤440 V AC

Load side				TSE		TA10						TA16					
				Rating (A)		32	40	50	63	80	100	80	100	125	160		
				Ith (A) 60°C		32	40	50	63	80	100	80	100	125	160		
				Icw (kA)		3	3	3	3	3	3	5.5	5.5	5.5	5.5		
				Icm (kA)		15	15	15	15	15	15	20	20	20	20		
Supply side Icu				Icu (kA)													
Circuit breaker:				415 V	440 V	Ir (A)	TSE conditionnal short-circuit current and related making capacity:										
NSXm E TMD Micrologic 4.1				16	10	Ir <= 32	T	T	T	T	T	T	T	T	T		
						Ir <= 40		T	T	T	T	T	T	T	T	T	
						Ir <= 50			T	T	T	T	T	T	T	T	T
						Ir <= 63			T	T	T	T	T	T	T	T	T
						Ir <= 80					T	T	T	T	T	T	T
						Ir <= 100						T		T	T	T	T
						Ir <= 125										T	T
														T			
NSXm B TMD Micrologic 4.1				25	20	Ir <= 32	T	T	T	T	T	T	T	T	T		
						Ir <= 40		T	T	T	T	T	T	T	T	T	T
						Ir <= 50			T	T	T	T	T	T	T	T	T
						Ir <= 63			T	T	T	T	T	T	T	T	T
						Ir <= 80					T	T	T	T	T	T	T
						Ir <= 100						T		T	T	T	T
						Ir <= 125										T	T
														T			
NSXm F TMD Micrologic 4.1				36	35	Ir <= 32	T	T	T	T	T	T	T	T	T		
						Ir <= 40		T	T	T	T	T	T	T	T	T	T
						Ir <= 50			T	T	T	T	T	T	T	T	T
						Ir <= 63			T	T	T	T	T	T	T	T	T
						Ir <= 80					T	T	T	T	T	T	T
						Ir <= 100						T		T	T	T	T
						Ir <= 125										T	T
														T			
NSXm N TMD Micrologic 4.1				50	50	Ir <= 32	36/75	36/75	36/75	36/75	36/75	36/75	T	T	T	T	
						Ir <= 40		36/75	36/75	36/75	36/75	36/75	T	T	T	T	T
						Ir <= 50			36/75	36/75	36/75	36/75	T	T	T	T	T
						Ir <= 63				36/75	36/75	36/75	T	T	T	T	T
						Ir <= 80					36/75	36/75	T	T	T	T	T
						Ir <= 100						36/75		T	T	T	T
						Ir <= 125										T	T
														T			
NSXm N TMD Micrologic 4.1				70	65	Ir <= 32	36/75	36/75	36/75	36/75	36/75	36/75	T	T	T	T	
						Ir <= 40		36/75	36/75	36/75	36/75	36/75	T	T	T	T	T
						Ir <= 50			36/75	36/75	36/75	36/75	T	T	T	T	T
						Ir <= 63				36/75	36/75	36/75	T	T	T	T	T
						Ir <= 80					36/75	36/75	T	T	T	T	T
						Ir <= 100						36/75		T	T	T	T
						Ir <= 125										T	T
														T			

T

: Protection of the Transfer Switching Equipment is ensured but combination not very relevant

T

: Transfer Switching Equipment is totally coordinated up to the Icu of the circuit breaker installed on supply side

36/75

: Transfer Switching Equipment is protected up to 36 kA rms / 75 kA peak

: Protection of the Transfer Switching Equipment is not ensured.

Circuit Breaker/Transfer Switching Equipment Coordination

Upstream: ComPacT NSX100-250

Downstream: TransferPacT TA10, TA16

Ue: ≤440 V AC

Load side				TSE		TA10						TA16				
				Rating (A)		32	40	50	63	80	100	80	100	125	160	
				Ith (A) 60°C		32	40	50	63	80	100	80	100	125	160	
				Icw (kA)		3	3	3	3	3	3	5.5	5.5	5.5	5.5	
				Icm (kA)		15	15	15	15	15	15	20	20	20	20	
Supply side Icu				Icu (kA)												
Circuit breaker:				415 V	440 V	Ir (A)	TSE conditionnal short-circuit current and related making capacity:									
NSX100B NSX160B TMD/TMG/ Micrologic				25	20	Ir <= 32	T	T	T	T	T	T	T	T	T	
						Ir <= 40		T	T	T	T	T	T	T	T	
						Ir <= 50			T	T	T	T	T	T	T	T
						Ir <= 63				T	T	T	T	T	T	T
						Ir <= 80						T		T	T	T
						Ir <= 100						T		T	T	T
						Ir <= 125									T	T
													T			
NSX250B TMD/TMG/ Micrologic				25	20	Ir <= 32	T	T	T	T	T	T	T	T	T	
						Ir <= 40		T	T	T	T	T	T	T	T	T
						Ir <= 50			T	T	T	T	T	T	T	T
						Ir <= 63				T	T	T	T	T	T	T
						Ir <= 80						T		T	T	T
						Ir <= 100						T		T	T	T
						Ir <= 125									T	T
													T			
NSX100F NSX160F TMD/TMG/ Micrologic				36	35	Ir <= 32	T	T	T	T	T	T	T	T	T	
						Ir <= 40		T	T	T	T	T	T	T	T	T
						Ir <= 50			T	T	T	T	T	T	T	T
						Ir <= 63				T	T	T	T	T	T	T
						Ir <= 80						T		T	T	T
						Ir <= 100						T		T	T	T
						Ir <= 125									T	T
													T			
NSX250F TMD/TMG/ Micrologic				36	35	Ir <= 32	25/52	25/52	25/52	25/52	25/52	25/52	T	T	T	T
						Ir <= 40		25/52	25/52	25/52	25/52	25/52	T	T	T	T
						Ir <= 50			25/52	25/52	25/52	25/52	T	T	T	T
						Ir <= 63				25/52	25/52	25/52	T	T	T	T
						Ir <= 80					25/52	25/52		T	T	T
						Ir <= 100						25/52		T	T	T
						Ir <= 125									T	T
													T			
NSX100N/H NSX160N/H TMD/TMG/ Micrologic				50/ 70	50/ 65	Ir <= 32	36/75	36/75	36/75	36/75	36/75	36/75	T	T	T	T
						Ir <= 40		36/75	36/75	36/75	36/75	36/75	T	T	T	T
						Ir <= 50			36/75	36/75	36/75	36/75	T	T	T	T
						Ir <= 63				36/75	36/75	36/75	T	T	T	T
						Ir <= 80					36/75	36/75		T	T	T
						Ir <= 100						36/75		T	T	T
						Ir <= 125									T	T
													T			
NSX250N/H TMD/TMG/ Micrologic				50/ 70	50/ 65	Ir <= 32	25/52	25/52	25/52				T	T	T	T
						Ir <= 40		25/52	25/52	25/52	25/52	25/52	T	T	T	T
						Ir <= 50			25/52	25/52	25/52	25/52	T	T	T	T
						Ir <= 63				25/52	25/52	25/52	T	T	T	T
						Ir <= 80					25/52	25/52		T	T	T
						Ir <= 100						25/52		T	T	T
						Ir <= 125									T	T
													T			

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

✓ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Circuit Breaker/Transfer Switching Equipment Coordination

Upstream: ComPacT NSX100-250

Downstream: TransferPacT TA10, TA16

Ue: ≤440 V AC

Load side			TSE		TA10						TA16			
			Rating (A)		32	40	50	63	80	100	80	100	125	160
			Ith (A) 60°C		32	40	50	63	80	100	80	100	125	160
			Icw (kA)		3	3	3	3	3	3	5.5	5.5	5.5	5.5
			Icm (kA)		15	15	15	15	15	15	20	20	20	20
Supply side			Icu (kA)											
Circuit breaker:			415 V	440 V	Ir	TSE conditionnal short-circuit current and related making capacity:								
NSX100S/L/R NSX160S/L/R TMD/TMG/ Micrologic	100/ 150/ 200	90/ 150/ 200			Ir ≤ 32	36/75	36/75	36/75	36/75	36/75	36/75	65/143	65/143	65/143
					Ir ≤ 40		36/75	36/75	36/75	36/75	36/75	65/143	65/143	65/143
					Ir ≤ 50			36/75	36/75	36/75	36/75	65/143	65/143	65/143
					Ir ≤ 63				36/75	36/75	36/75	65/143	65/143	65/143
					Ir ≤ 80					36/75	36/75	65/143	65/143	65/143
					Ir ≤ 100						36/75	65/143	65/143	65/143
					Ir ≤ 125								65/143	65/143
					Ir ≤ 160									65/143
NSX250S/L/R TMD/TMG/ Micrologic	100/ 150/ 200	90/ 150/ 200			Ir ≤ 32	25/52	25/52	25/52	25/52	25/52	25/52	65/143	65/143	65/143
					Ir ≤ 40		25/52	25/52	25/52	25/52	25/52	65/143	65/143	65/143
					Ir ≤ 50			25/52	25/52	25/52	25/52	65/143	65/143	65/143
					Ir ≤ 63				25/52	25/52	25/52	65/143	65/143	65/143
					Ir ≤ 80					25/52	25/52	65/143	65/143	65/143
					Ir ≤ 100						25/52	65/143	65/143	65/143
					Ir ≤ 125								65/143	65/143
					Ir ≤ 160									65/143

T	: Protection of the Transfer Switching Equipment is ensured but combination not very relevant
T	: Transfer Switching Equipment is totally coordinated up to the Icu of the circuit breaker installed on supply side
36/75	: Transfer Switching Equipment is protected up to 36 kA rms / 75 kA peak
	: Protection of the Transfer Switching Equipment / circuit breaker is not ensured.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☑ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Circuit Breaker/Transfer Switching Equipment Coordination

Upstream: ComPacT NSX100-630 NS630b NS800L/H/L

Downstream: TransferPacT Automatic TA25, TR25, TA63, TR63, TA80, TR80

Ue: ≤440 V AC

Load side				TSE		TA25, TR25				TA63, TR63				TA80, TR80	
				Rating (A)		100	160	200	250	320	400	500	630	800	
				Ith (A) 60 °C		100	160	200	250	320	400	500	630	800	
				Icw (kA)		15/0.1s	15/0.1s	15/0.1s	15/0.1s	25/0.1s	25/0.1s	25/0.1s	25/0.1s	25/0.1s	
						10/0.5s	10/0.5s	10/0.5s	10/0.5s	20/0.5s	20/0.5s	20/0.5s	20/0.5s	20/0.5s	
						8/1s	8/1s	8/1s	8/1s	15/1s	15/1s	15/1s	15/1s	15/1s	
				Icm (kA)		30	30	30	30	40	40	40	40	40	
Supply side				Icu (kA)											
Circuit breaker:				415 V	440 V	Ir	TTSE conditionnal short-circuit current and related making capacity:								
NSX100B/F/N/H/S/L				25/36/50/70/100/150	20/35/50/65/90/130	Ir≤100	T	T	T	T	T	T	T	T	
NSX160B/F/N/H/S/L						Ir≤160		T	T	T	T	T	T	T	
NSX250B/F/N/H/S/L						Ir≤200			T	T	T	T	T	T	
TMD/TMG/ Micrologic						Ir≤250				T	T	T	T	T	
NSX100R				200	200	Ir≤100	T	T	T	T	T	T	T	T	
NSX250R						Ir≤160		T	T	T	T	T	T	T	
TMD/TMG/ Micrologic						Ir≤200			T	T	T	T	T	T	
						Ir≤250				T	T	T	T	T	
NSX400F/N/H/S/L NSX630F/N/H/S/L Micrologic Note: Min. In 100 A Max. In 570A				36/50/70/100/150	30/42/65/90/130	Ir=100	T	T	T	T	T	T	T	T	
						Ir≤160		T	T	T	T	T	T	T	T
						Ir≤200			T	T	T	T	T	T	T
						Ir≤250				T	T	T	T	T	T
						Ir≤320					T	T	T	T	T
						Ir≤400						T	T	T	T
						Ir≤500							T	T	T
NSX400R NSX630R Micrologic Note: Min. In 100 A Max. In 570A				200	200	Ir=100	150/330	150/330	150/330	150/330	T	T	T	T	
						Ir≤160		150/330	150/330	150/330	T	T	T	T	T
						Ir≤200			150/330	150/330	T	T	T	T	T
						Ir≤250				150/330	T	T	T	T	T
						Ir≤320					T	T	T	T	T
						Ir≤400						T	T	T	T
						Ir≤500							T	T	T
NS630b/800 N				50	50	Ir≤630						T	T		
						Ir≤800									
						Ir≤320				20/50	20/50	20/50	20/50	20/50	20/50
						Ir≤400					20/50	20/50	20/50	20/50	20/50
						Ir≤500						20/50	20/50	20/50	20/50
NS630b/800H				70	65	Ir≤630						20/50	20/50		
						Ir≤800								20/50	20/50
						Ir≤320				20/50	20/50	20/50	20/50	20/50	20/50
						Ir≤400					20/50	20/50	20/50	20/50	20/50
						Ir≤500						20/50	20/50	20/50	20/50
NS630b/800 L				150	130	Ir≤630						T	T		
						Ir≤800									T
						Ir≤320					T	T	T	T	T
						Ir≤400						T	T	T	T
						Ir≤500							T	T	T

T : Transfer Switching Equipment is totally coordinated up to the Icu of the circuit breaker installed on supply side

150/330 : Transfer Switching Equipment is protected up to 150 kA rms / 330 kA peak

: Protection of the Transfer Switching Equipment / circuit breaker is not ensured.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Circuit Breaker/Transfer Switching Equipment Coordination

Upstream: ComPacT NS630b to 1600/ MasterPact MTZ1/MTZ2

Downstream: TransferPacT Automatic TA1A

Ue: ≤440 V AC

Load side		TSE		TA1A(1600)			
		Rating (A)		800	1000	1250	1600
		Ith (A) 60 °C		32	40	50	63
		Icw (kA)		70/0.1s 50/0.5s	70/0.1s 50/0.5s	70/0.1s 50/0.5s	70/0.1s 50/0.5s
		Icm (kA)		105	105	105	105
Supply side		Icu (kA)					
Circuit breaker:		415 V	440 V	TTSE conditionnal short-circuit current and related making capacity:			
NS630b-1600N	50	50	I _r ≤800	T	T	T	T
			I _r ≤1000		T	T	T
			I _r ≤1250			T	T
			I _r ≤1600				T
NS630b/1600H	70	65	I _r ≤800	T	T	T	T
			I _r ≤1000		T	T	T
			I _r ≤1250			T	T
			I _r ≤1600				T
NS630b/1000 L	150	130	I _r ≤800	T	T	T	T
			I _r ≤1000		T	T	T
			I _r ≤1250			T	T
			I _r ≤1600				T
MTZ1 H1 06-16	42	42	I _r ≤800	T	T	T	T
			I _r ≤1000		T	T	T
			I _r ≤1250			T	T
			I _r ≤1600				T
MTZ1 H2 06-16	50	50	I _r ≤800	T	T	T	T
			I _r ≤1000		T	T	T
			I _r ≤1250			T	T
			I _r ≤1600				T
MTZ1 H3 06-16	66	66	I _r ≤1250			T	T
			I _r ≤1600				T
			I _r ≤800	T	T	T	T
			I _r ≤1000		T	T	T
			I _r ≤1250			T	T
			I _r ≤1600				T
MTZ1 L1 06-10	150	130	I _r ≤800	T	T	T	T
			I _r ≤1000		T	T	T
			I _r ≤1250			T	T
			I _r ≤1600				T
MTZ2 N1 08-20	42	42	I _r ≤800	T	T	T	T
			I _r ≤1000		T	T	T
			I _r ≤1250			T	T
			I _r ≤1600				T
MTZ2 H1 08-20	66	66	I _r ≤800	50/105	50/105	50/105	50/105
			I _r ≤1000		50/105	50/105	50/105
			I _r ≤1250			50/105	50/105
			I _r ≤1600				50/105
MTZ2 H2 08-20	100	100	I _r ≤800	50/105	50/105	50/105	50/105
			I _r ≤1000		50/105	50/105	50/105
			I _r ≤1250			50/105	50/105
			I _r ≤1600				50/105

T

: Total coordination, Transferpact is protected up to Icu of downstream circuit-breaker

50/105

: Transferpact is protected up to 70 kArms/130 kA peak of presumed short-circuit current

: Protection of the Transfer Switching Equipment / circuit breaker is not ensured.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

WATSN (ATS and RTS)

WATSN is a Compact , Easy and Scalable Transfer Switch for safe and reliable source management.

- Conforming to IEC 60947-6-1
- Automatic and Remote Transfer switches
- Three Position, Open Transition Transfer Switch
- 2,3,4 pole configurations ranging within 63 -630A
- Fast Transfer Speed of <100ms
- Solenoid operated, Built-in Microprocessor Controller(for ATS)
- Reduced size and footprint upto 30%
- Tested for Total Discrimination with EasyPacT CVS Circuit breakers for seamless integration in the power train.
- Utilization Category: AC 33B



WATSN Automatic Transfer Switch

Rating (amps)	Poles	Reference	Unit MRP [₹]	Poles	Reference	Unit MRP [₹]	Poles	Reference	Unit MRP [₹]
63	2P	NA00632V	42640	3P	NA00633V	44200	4P	NA00634V ✓	45240
100	2P	NA01002V	53560	3P	NA01003V	55120	4P	NA01004V ✓	57200
160	2P	N2A01602V	85280	3P	N2A01603V	86320	4P	N2A01604V ✓	87360
250	-	-	-	3P	NA02503V	156000	4P	NA02504V ✓	161200
400	-	-	-	3P	NA04003V	265200	4P	NA04004V ✓	286000
630	-	-	-	3P	NA06303V	332800	4P	NA06304V ✓	343200

WATSN Remote Transfer Switch

Rating (amps)	Poles	Reference	Unit MRP [₹]	Poles	Reference	Unit MRP [₹]	Poles	Reference	Unit MRP [₹]
63	2P	NR00632	On Request	3P	NR00633	On Request	4P	NR00634	On Request
100	2P	NR01002	On Request	3P	NR01003	On Request	4P	NR01004	On Request
160	2P	N2R01602	On Request	3P	N2R01603	On Request	4P	N2R01604	On Request
250	2P	-	-	3P	NR02503	On Request	4P	NR02504	On Request
400	2P	-	-	3P	NR04003	On Request	4P	NR04004	On Request
630	2P	-	-	3P	NR06303	On Request	4P	NR06304	On Request

WATSN Accessories



Function Module



T-Helper

WATSN is a simple and scalable transfer switch with add-on function modules.(Any two function modules can be connected at a time)

Accessory Type	Description	Reference	Unit MRP [₹]
Fire Protection function modules	DC24V Constant voltage fire linkage	NF001	On Request
	DC24V Pulse fire linkage	NF002	On Request
	AC220V Constant voltage fire linkage	NF003	On Request
	AC220V Pulse fire linkage	NF004	On Request
	Passive fire linkage	NF005	On Request
Control and Signalling function modules	Genset control module	NF006	On Request
	Genset control&Communication module	NF008	On Request
	Remote control to S2	NF012	On Request
Communication accessories	Modbus communication module with RS485 interface	NF007	On Request
	T-Helper Operation and maintenance Helper	NF028 ✓	On Request

*For more details on accessories, please contact Customer Care Centre.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

✓ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Class PC transfer switch

Circuit-breaker / Transfer Switch Equipment coordination

Complementary
technical informations
Ue ≤415 VAC

Upstream
Downstream

EasyPacT CVS
WATSN

Load side		TSE	WATSN			
		Rating	100	160	250	630
		Ith (A) 40°C	100	160	250	630
		Icw (kA)	5	10	10	12
		Icm (kAp)	7.65	17	17	25
Supply side	Icu (kA)					
Circuit breaker:	415V	Ir	TSE conditionnal short-circuit current and related making capacity:			
CVS100B	25		5	T	T	T
CVS160B	25			T	T	T
CVS250B	25				T	T
CVS100F	36		5	25	25	T
CVS160F	36			25	25	T
CVS250F	36				25	T
CVS400F	36					36
CVS630F	36					36
CVS100N	50		5	25	25	T
CVS160N	50			25	25	T
CVS250N	50				25	T
CVS400N/H	50/70					36
CVS630N/H	50/70					36

T

Transfer Switch Equipment is Totally coordinated up to Icu of circuit breaker installed on supply side.

Protection of the Transfer Switch Equipment is not ensured

[illegible]



Schneider Electric India Pvt. Ltd.

Corporate Office: 15th Floor, DT-4 Downtown, DLF Phase 3, Sector 25A, Gurugram, Haryana - 122002

Ahmedabad

Schneider Electric India (P) Ltd.
1506-1507, 15th Floor Shapth-5
Opp.Karnavati Club, SG Highway,
Ahmedabad, Gujarat - 380015
Tel.: 079-66826701

Bengaluru

Schneider Electric India (P) Ltd.
No. 3/1, JP Techno Park
Mezzanine Floor, Millers Tank Bund
Road, Vasanth Nagar
Bengaluru - 560052
Tel.: 080-71481351

Bhubaneswar

Schneider Electric India (P) Ltd.
Workloop Co-Working in the property
Office No. 316, Esplanade One Mall
Rasulgarh, Bhubaneswar - 751010

Chennai

Schneider Electric India (P) Ltd.
No: 29, 2nd Floor,
Bannari Amman Towers, B-Block
Dr. Radhakrishnan Road, Mylapore
Chennai - 600 004
Tel.:044-71912000

Cochin

Schneider Electric India (P) Ltd.
Alapatt Properties Private Limited
(Trade Name: Centre A)
Main Door Number: 66/4971
(Old Door Number: 40/6584-H)
7th Floor Alapatt Heritage Building
MG Road Kochi - 682035

Coimbatore

Schneider Electric India Pvt. Ltd.
Mikro Grafeio Services Pvt Ltd.,
Elysium Tower, #21, A.T.T
Colony, Near Honda Office,
Coimbatore, Tamil Nadu - 641018

Hyderabad

Schneider Electric Pvt. Ltd.
4B-4th Floor, Gumidelli Towers,
Prakash Nagar, Begumpet,
Hyderabad - 500016

Indore

Schneider Electric India (P) Ltd.
219, Dhan Trident Building
Vijay Nagar, A.B.Road
Indore - 452001

Jaipur

Schneider Electric India (P) Ltd.
Jaipur Business Centre 309
3rd Floor, Sangam Tower 190
Church Road, Jaipur - 302001
Tel.: 0141-2374810

Kolkata

Schneider Electric (I) Pvt. Ltd.
BN3, Salt Lake, Sector V,
Kolkata - 700091

Lucknow

Schneider Electric India (P) Ltd.
Summit, Plot No. TCG 3/3
6th Floor, 604A/B/C, Vibhuti Khand
Gomti Nagar, Lucknow
Uttar Pradesh - 226010
Tel.: 0522-3500334

Ludhiana

Schneider Electric India (P) Ltd.
SCO 23, 2nd Floor,
Chandigarh Road, Sector 32
Ludhiana, Punjab -141010
Tel.: 0161- 5203011

Mohali

Schneider Electric India (P) Ltd.
2nd Floor, Tower-A
Bestech Business Tower
Mega Information & Technology Park
Industrial Plot No.1, Phase IX
(Expansion), Mohali - 160059
Tel.: 0172-7198200

Mumbai

Schneider Electric India Pvt. Ltd.
L&T Business Park, Tower B,
7th Floor, TC-II, Gate No.5,
Saki Vihar Road, Powai,
Mumbai - 400072

Nagpur

Schneider Electric India (P) Ltd.
6, Vasant Vihar Complex
W.H.C Road, Shankar Nagar
Nagpur - 440010
Tel.: 0712-2558581

Nashik

Schneider Electric India (P) Ltd.
401, 4th Floor, Rishi Raj Towers
Jehan Circle, Gangapur Road
Nashik - 422013
Tel.: 0253-2344333

New Delhi

Schneider Electric India (P) Ltd.
C-56, Mayapuri Industrial Area, Phase-2
New Delhi - 110064
Tel.: 011-61317400

Pune

Schneider Electric India (P) Ltd.
Amar Caliber, CTS No 911, BMCC Road,
OFF F.C. Road, Deccan Gymkhana,
Shivaji Nagar, Pune - 411007
Tel.: 020-67492500

Vadodara

Schneider Electric India (P) Ltd.
Notus IT Park, 10th Floor, Block-D
Sarabhai Campus, Vadiwadi
Vadodara, Gujarat - 390017

Vishakhapatnam

Schneider Electric India (P) Ltd.
D.N.10-1-43, 1st Floor
Ratnam's Business Centre,
Siripuram Fort, C.B.M.Compound
Visakhapatnam - 530016
Tel.: 0891-6675500

Customer Care Centre

Monday-Saturday, 9 a.m. to 8 p.m.
Toll-free numbers: 1800 419 4272, 1800 103 0011
Email: customer-care.in@schneider-electric.com

For more information, visit our website at: www.se.com/in

- All Prices are in Indian Rupees
- Prices are subject to change without prior notice
- Product evolution is a continuous process and Schneider Electric reserves the right to modify/withdraw any product at any time without prior notice
- Prices charged will be as prevailing on the date of dispatch
- Invoice Amount = (MRP – less Applicable discount) + Applicable GST %
- Tax incidence on invoices is basis applicable GST rates
- Invoice amount not to exceed MRP
- Product pictures shown are for illustration purpose only; actual product may vary
- Kindly refer product datasheet for detailed specification

Distributor